



2016

Like Us On  
facebook 

**wiha** 

Tools that work for you





# Professional TorqueControl Screwdrivers




*Complete TorqueControl Program*









### Wiha TorqueFix Wing Handles & Blades

DESCRIPTION	Page
 TorqueFix Handle	4
 Hex Metric Blades	4
 TORX Blades	4
 TORXPlus Blades	4



### Wiha TPMS Install / Repair Kit

DESCRIPTION	Page
 TPMS Set	4

### Wiha TorqueControl Tools

DESCRIPTION	Page
 TorqueFix Handle	5
 TorqueVario Handle	5
 TorqueVario Handle (Newton Meter Scale)	5
 Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex	6
 MicroBits Slotted, Phillips, Torx®, Security Torx® Hex, Security Hex, Pentalobe & Nut Setters	9
 TorqueControl Sets	10-11


### Wiha TorqueControl Blades & Bits

DESCRIPTION	Page
 Standard Blades Slotted, Phillips, Torx®, TorxPlus®, Hex	6
 MicroBits Slotted, Phillips, Torx®, Security Torx® Hex, Security Hex, Pentalobe & Nut Setters	9



### Wiha EasyTorque Handles

DESCRIPTION	Page
 EasyTorque Handles	7
 EasyTorque TORX	7
 EasyTorque TORXPlus	7



### Wiha iTorque Handles & Sets

DESCRIPTION	Page
 iTorque Handles	8
 iTorque Sets	8

### Wiha TorqueControl Accessories

DESCRIPTION	Page
 TorqueControl Adapters	6-7
 Torque Cable Key	7

### Wiha SoftFinish Pistol Ratchets & Adapters

DESCRIPTION	Page
 Pistol Ratchet Handles	12
 Pistol Ratchet Adapters	12



## Wiha TPMS Install / Repair Kit



### 12 Piece Set



**Valve Stem Removal Bit**  
For fastening the valve core element



With Certificate of Calibration



### 28580 12 Piece Tire Pressure Monitoring System Set, In Molded Storage Box

A torque tool set for the professional installation of all standard TPMS sensors which is suitable for all valve manufacturers & car brands.

#### Item No.

**28580 12 Piece Set Includes:**

**TORX®:** T10, T15, T20

**Nut Drivers Metric:** 11, 12mm

**TorqueVario-S Handle Range:** 0.3 - 2.0Nm (2.6 - 17.7 in/lbs.)

**TorqueVario-S Handle Range:** 2.0 - 9.0Nm (17.7 - 79.6 in/lbs.)

Torque Setter Tool

Valve Stem Removal Bit

1/4" Bit Holder for Handle 0.3 - 2.0Nm

1/4" Bit Holder for Handle 2.0 - 9.0Nm

1/4" Adapter Blade for Handle 2.0 - 9.0Nm

\*Torque Handle Tolerance +/- 6%



## Wiha TorqueFix Wing Keys Handles & Blades

- Audible Click At Torque
- Replaceable Blades
- +/- 6% Repeatability
- Extremely Compact
- Quick Turning Zone



Low profile for easy access

Small & Compact

Very slim blade diameter for hard to reach screws

Torque tool for very tight machine assembly spaces



EN ISO 6798,  
BS EN 26789, ASME  
B107.14M

+/- 6% Accuracy

Includes Calibration Certificate



### 283 TorqueFix Wing Handles

Audible & perceptible click when torque setting has been attained.

Item No.	Nm	mm	Inch	pkg.	lbs.
28349	0.5	68	2.7	1	.28
28351	0.6	68	2.7	1	.28
28352	0.9	68	2.7	1	.28
28353	1.1	68	2.7	1	.28
28354	1.2	68	2.7	1	.28
28355	1.4	68	2.7	1	.28
28356	2.0	68	2.7	1	.28
28357	2.5	68	2.7	1	.28
28358	3.0	68	2.7	1	.28
28359	3.8	68	2.7	1	.28
28360	4.0	68	2.7	1	.28



### 283 Hex Metric Blades For TorqueFix

Wing Handles CVM steel, through-hardened, titanium silver.

Item No.	Size	Max Nm	Inch	mm	lbs.	pkg.
28361	1.5	0.9	3.0	75	.03	1
28362	2.0	1.8	3.0	75	.03	1
28363	2.5	3.8	3.0	75	.03	1
28364	3.0	5.5	3.0	75	.03	1
28365	4.0	8.0	3.0	75	.03	1



### 283 TORX® Blades For TorqueFix

Wing Handles CVM steel, through-hardened, titanium silver.


Item No.	Size	Max Nm	Inch	pkg.	lbs.
28374	T6	0.6	3.0	1	.03
28375	T7	0.9	3.0	1	.03
28376	T8	1.3	3.0	1	.03
28377	T9	2.5	3.0	1	.03
28378	T10	3.8	3.0	1	.03
28379	T15	5.5	3.0	1	.03
28380	T20	8.0	3.0	1	.03
28381	T25	8.0	3.0	1	.03



### 283 TORXPlus® Blades For TorqueFix

Wing Handles CVM steel, through-hardened, titanium silver.

Item No.	Size	Max Nm	Inch	pkg.	lbs.
28382	IP6	0.8	3.0	1	.03
28383	IP7	1.3	3.0	1	.03
28384	IP8	2.0	3.0	1	.03
28385	IP9	3.0	3.0	1	.03
28386	IP10	4.5	3.0	1	.03
28387	IP15	6.6	3.0	1	.03
28388	IP20	8.0	3.0	1	.03
28389	IP25	8.0	3.0	1	.03

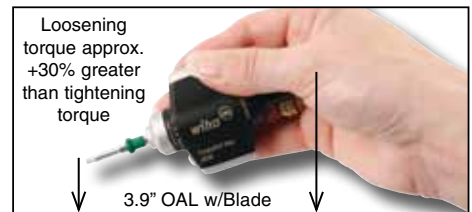



**Wiha Adjustable TorqueControl Tools**

**Wiha TorqueControl Screwdrivers**

- *TorqueFix* factory preset torque
- *TorqueVario* adjustable torque drivers

*molded cushion grip two component handles allow for maximum achievable torque to be reached with comfort.*


*Precise repeatability!*

*All TorqueFix & TorqueVario tools are tested and comply with:*

- **EN ISO 6798**
- **BS EN 26789**
- **ASME B107.14M**

**Each tool has unique serial number and certificate of calibration**

Whether it's TorqueVario-S or TorqueFix - Wiha has a torque screwdriver to cover almost every application

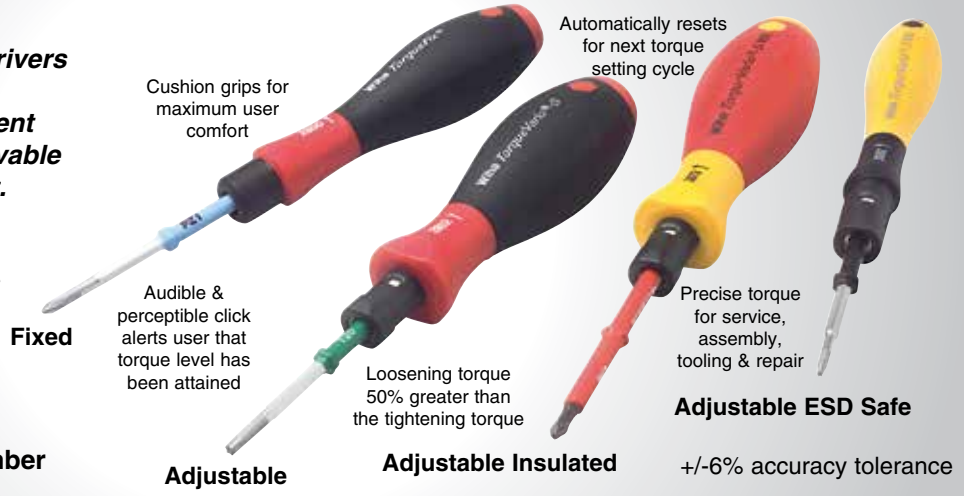

+/-6% accuracy tolerance  
Certificate of calibration



**SHOP**

Direct Reading Scale



+/-6% accuracy tolerance  
Certificate of calibration

**SHOP**



+/-6% accuracy tolerance  
Certificate of calibration

**SHOP**

**285 TorqueFix, With Wiha-SoftFinish®**

**Handle** Fixed Torque value pre-set. Tested in accordance with EN ISO 6798, BS EN 26789, ASME B107.14M, tolerance +/- 6%. Audible & perceptible click when pre-set torque has been attained. Automatically resets for next torque cycle; 50% greater reverse torque.

Item No.	Pre-Sets		Nm	mm	Inch	lbs.	pkg.
	oz.	lbs.					
28503	80	5	0.56	112	4.4	.16	1
28505	120	7.5	0.84	112	4.4	.15	1
28507	160	10	1.12	119	4.7	.28	1
28509	200	12.5	1.41	119	4.7	.27	1
28511	240	15	1.69	119	4.7	.27	1
28513	320	20	2.25	119	4.7	.28	1
28515	400	25	2.82	126	4.9	.37	1
28517	480	30	3.39	126	4.9	.37	1
28518	560	35	3.95	126	4.9	.37	1
28519	640	40	4.52	126	4.9	.37	1
28521	800	50	5.65	132	5.2	.52	1
28523	960	60	6.78	132	5.2	.52	1
28525	1120	70	7.91	132	5.2	.52	1

**285 Adjustable TorqueVario With Direct Reading Scale**

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergonomic molded multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible and perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

Item No.	Range	Increments	Pkg. 1	
			mm	lbs.
28501*	15 - 80(in/oz)	2.5 In.oz.	127	.22
28502	5 - 10	.5 In.lbs.	127	.41
28504	7.5 - 20	.5 In.lbs.	131	.50
28506	10 - 50	2 In.lbs.	138	.59
28508	20 - 70	2 In.lbs.	142	.74


- Above includes Micro Bit Holder 28583
- See 4mm Micro Bits on Page 9
- 28501 +/- 10% (This unit only)\*

**285 Adjustable TorqueVario-S Handle - In Newton Meter Scale**

EN ISO 6798, BS EN 26789, ASME B107.14M. Ergo molded multi-component handle, light & compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when the torque setting has been attained, automatically resets for next torque cycle.

Item No.	Newton Meter Scale	Increments	Pkg. 1	
			mm	lbs.
28550*	0.1 - 0.6Nm	.02 Nm	127	.35
28551	0.4 - 1.0Nm	.05 Nm	127	.35
28552	0.8 - 2.0Nm	.10 Nm	131	.45
28553	1.0 - 5.0Nm	.20 Nm	138	.55
28554	2.0 - 8.0Nm	.25 Nm	142	.70

\* +/- 10% (This unit only)

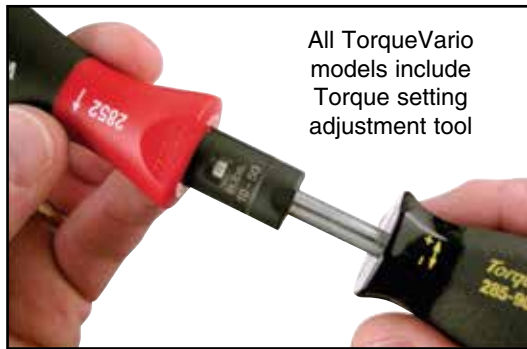

All TorqueVario models include Torque setting adjustment tool

**Wiha TorqueControl Blades - For Easy Torque, TorqueFix & TorqueVario Handles**



[SHOP](#)

**285 Slotted Interchangeable Blades For TorqueFix & TorqueVario** Slotted tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.


Item					Max. lbs.	Max. Nm	
No.	mm	Inch	mm	lbs.	Nm	pkg.	
28534	1.5	.059	175	.07	0.15	1	
28535	2.0	.078	175	.07	0.4	1	
28536	2.5	.098	175	.07	0.4	1	
28537	3.0	.118	175	.07	0.6	1	
28538	3.5	.139	175	.07	1.1	1	
28539	4.0	.157	175	.07	2.5	1	



[SHOP](#)

**285 Hex Inch Interchangeable Blades For TorqueFix & TorqueVario** Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	Inch	mm	lbs.	Nm	pkg.		
28555	.050	175	.07	.4	1		
28556	1/16	175	.07	.9	1		
28557	5/64	175	.07	1.8	1		
28558	3/32	175	.07	1.8	1		
28559	7/64	175	.07	3.8	1		
28560	1/8	175	.07	5.5	1		
28587	9/64	175	.07	8.0	1		
28588	5/32	175	.07	8.0	1		



[SHOP](#)

**285 MagicSpring TORX® Interchangeable Blades For TorqueFix & TorqueVario** blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	Size	mm	mm	lbs.	Nm	pkg.	
28512	T6	175	4.0	.07	0.6	1	
28527	T7	175	4.0	.07	0.9	1	
28528	T8	175	4.0	.07	1.3	1	
28529	T9	175	4.0	.07	2.5	1	
28530	T10	175	4.0	.07	3.8	1	
28531	T15	175	4.0	.07	5.5	1	
28532	T20	175	4.0	.07	8.0	1	
28533	T25	175	4.0	.07	8.0	1	



[SHOP](#)

**285 Phillips Interchangeable Blades For TorqueFix & TorqueVario** Phillips tip blades on narrow 5/32 Hex shafts. High alloy chrome-vanadium-molybdenum steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	Size	mm	mm	lbs.	Nm	pkg.	
28540	000	175	4.0	.07	0.4	1	
28541	00	175	4.0	.07	0.4	1	
28542	0	175	4.0	.07	0.9	1	
28543	1	175	4.0	.07	3.8	1	
28544	2	175	4.0	.07	5.5	1	



[SHOP](#)

**285 Hex Metric Interchangeable Blades For TorqueFix & TorqueVario** Hex tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	mm	mm	lbs.	Nm	pkg.		
28545	1.5	175	.07	0.9	1		
28546	2.0	175	.07	1.8	1		
28547	2.5	175	.07	3.8	1		
28548	3.0	175	.07	5.5	1		
28549	4.0	175	.07	8.0	1		



[SHOP](#)

**286 MagicSpring TORXPlus® Interchangeable Blades For TorqueFix & TorqueVario** blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	Size	mm	mm	lbs.	Nm	pkg.	
28611	IP6	175	4.0	.07	0.8	1	
28612	IP7	175	4.0	.07	1.3	1	
28613	IP8	175	4.0	.07	2.0	1	
28614	IP9	175	4.0	.07	3.0	1	
28616	IP10	175	4.0	.07	4.5	1	
28617	IP15	175	4.0	.07	6.6	1	
28618	IP20	175	4.0	.07	8.0	1	
28619	IP25	175	4.0	.07	8.0	1	



[SHOP](#)

**285 TORX® Interchangeable Blades For TorqueFix & TorqueVario** TORX® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	Size	mm	mm	lbs.	Nm	pkg.	
28561	T5	175	4.0	.07	0.4	1	
28562	T6	175	4.0	.07	0.6	1	
28563	T7	175	4.0	.07	0.9	1	
28564	T8	175	4.0	.07	1.3	1	
28565	T9	175	4.0	.07	2.5	1	
28566	T10	175	4.0	.07	3.8	1	
28567	T15	175	4.0	.07	5.5	1	
28568	T20	175	4.0	.07	8.0	1	
28569	T25	175	4.0	.07	8.0	1	



[SHOP](#)

**285 TORXPlus® Blades For TorqueFix & TorqueVario** TORXPlus® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item					Max. lbs.	Max. Nm	
No.	Size	mm	mm	lbs.	Nm	pkg.	
28571	IP5	175	4.0	.07	0.5	1	
28572	IP6	175	4.0	.07	0.8	1	
28573	IP7	175	4.0	.07	1.3	1	
28574	IP8	175	4.0	.07	2.0	1	
28575	IP9	175	4.0	.07	3.0	1	
28576	IP10	175	4.0	.07	4.5	1	
28577	IP15	175	4.0	.07	6.6	1	
28578	IP20	175	4.0	.07	8.0	1	
28579	IP25	175	4.0	.07	8.0	1	

\*None of the blades featured on this page will function in a TorqueVario Insulated Handle

**Wiha TorqueControl Adapters**



**28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits**

Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item					Max. lbs.	Max. Nm	
No.	Size	mm	mm	lbs.	pkg.		
28882	1/4	162	4.0	.09	1		

[SHOP](#)

**Wiha Torque Cable Keys**

Torque handles recommended  
#28552 & #28504



[SHOP](#)

**286 Torque Cable Key For Threaded Hex Connectors**

For torque controlled fastening of cable plug connectors with Hex heads. Used with Wiha-TorqueControl Screwdrivers.

Item No.	Size	mm	mm	mm	Max Nm	lbs.	pkg.
28620	8mm	4.0	78	218	1.0	.06	1
28622	9mm	4.0	78	218	1.0	.06	1
28624	11mm	4.0	78	218	1.5	.06	1
28626	12mm	4.0	78	218	1.5	.06	1
28627	13mm	4.0	78	218	1.5	.06	1
28629	14mm	4.0	78	218	1.5	.06	1
28632	17mm	4.0	78	218	1.5	.06	1
28633	18mm	4.0	78	218	1.5	.06	1
28637	22mm	4.0	90	233	2.0	.10	1
28638	24mm	4.0	90	233	2.0	.10	1



[SHOP](#)

**28644 Torque Cable Key For Threaded Hex Connectors - Inch**

Item No.	Size	mm	mm	mm	Max Nm	lbs.	pkg.
28644	1/2"	4.0	78	218	1.5	.06	1

**easyTorque Control Handles**

**"easy" Torque**

- Audible Click At Torque
- Replaceable Blades
- +/- 10% Repeatability
- Improve Productivity
- Reduces Waste
- Controls Costs
- Save Time!



Each tool factory preset

Torque accuracy of +/- 10% to 5000 cycles

Economical Torque Control for tooling assembly and repair

Reverse torque is 50% greater for easy removal using same tool

Uses 285 Series interchangeable blades on pg. 6



[SHOP](#)

**292 easyTorque Screwdriver Handle**

easyTorque value pre-set. Release accuracy +/- 10%. SoftFinish cushion grip handle for good power transfer.

Item No.	Pre-Sets Inch/lbs.	Nm	mm	Inch	lbs.	pkg.
29205	4.4	0.5	130	5.1	.20	1
29206	5.3	0.6	130	5.1	.20	1
29209	8.0	0.9	130	5.1	.20	1
29211	9.7	1.1	130	5.1	.20	1
29212	10.6	1.2	130	5.1	.20	1
29214	12.4	1.4	130	5.1	.20	1
29220	17.7	2.0	130	5.1	.20	1
29225	22.1	2.5	130	5.1	.20	1
29230	26.6	3.0	130	5.1	.20	1
29238	33.6	3.8	130	5.1	.20	1
29241	35.4	4.0	130	5.1	.20	1
29245	39.8	4.5	130	5.1	.20	1
29251	44.2	5.0	130	5.1	.20	1

\* No Calibration Certificates



[SHOP](#)

**292 easyTorque Screwdriver Handle With TORX® Blades**

easyTorque value pre-set. Release accuracy +/- 10%. Internal mechanism clicks when torque value has been attained. Cushion grip comfortable handle for good power transfer.

Item No.	Pre-Sets Size	Inch/lbs.	Nm	lbs.	pkg.
29232	T5	4.4	0.5	.24	1
29233	T6	5.3	0.6	.24	1
29234	T7	8.0	0.9	.24	1
29236	T8	10.6	1.2	.25	1
29237	T9	12.4	1.4	.25	1
29239	T10	17.7	2.0	.26	1
29242	T15	26.6	3.0	.26	1
29243	T20	35.4	4.0	.26	1
29244	T25	44.2	5.0	.28	1

\* No Calibration Certificates



[SHOP](#)

**292 easyTorque Screwdriver Handle With TORXPlus® Blades**

easyTorque value pre-set. Release accuracy +/- 10%. Internal mechanism clicks when torque value has been attained. Cushion grip comfortable handle for good power transfer.

Item No.	Pre-Sets Size	Inch/lbs.	Nm	lbs.	pkg.
29246	IP5	4.4	0.5	.24	1
29247	IP6	5.3	0.6	.24	1
29248	IP7	8.0	0.9	.24	1
29249	IP8	10.6	1.2	.25	1
29252	IP9	12.4	1.4	.25	1
29253	IP10	17.7	2.0	.26	1
29254	IP15	26.6	3.0	.26	1
29255	IP20	35.4	4.0	.26	1
29256	IP25	44.2	5.0	.28	1

\* No Calibration Certificates

**Wiha TorqueControl Adapters**

**Adapters For TorqueFix™ & TorqueVario™**



**28581 Bit Holder Adapter For 1/4" Drive Bits** Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28581	1/4	149	4.0	.09	1

[SHOP](#)



**28582 Square Drive Adapter For 1/4" Sockets** Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28582	1/4	145	4.0	.08	1

[SHOP](#)



**28583 Adapter Blade For 4mm MicroBits** Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28583	4.0	149	4.0	.09	1

[SHOP](#)



## Wiha TorqueControl Adjustable iTorque

### iTorque Screwdrivers

- Metric (Nm) & Inch (In-lbs / oz)
- Built in click counter
- Auto shut off
- Fast adjusting
- Cycle Counter
- Accurate +/- 6%



Digital Torque Control

Interchangeable blades or bits

With Certificate of Calibration Included



4mm bit holder included

[SHOP](#)

#### 288 iTorque Screwdriver Handles

EN ISO 6798, BS EN 26789, ASME B107.14M. Handle reads Nm & Inch/lbs. with built in click counter. Fast adjusting. Accurate +/- 6% Each iTorque handle includes a 4mm bit holder.

Item No.	Adjustable Maximum Torque	mm	Inch	pkg.
28886	60-210(in/oz.)	40-150(Ncm)	134 5.3	1
28887	7-26 in/lbs.	0.8-3.0 Nm	134 5.3	1
28888	9-50 in/lbs.	1.0-6.0 Nm	134 5.3	1

\* Calibration Certificates Included



Quick Adjusting

Digital Display

Push Button Start  
Push Button Conversion

Fast Conversion  
Nm to In/lbs.

With Certificate of Calibration



52 Pc. Set

[SHOP](#)

**28891 52 Piece iTorque Bit Set, In Metal Storage Box** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 60-210 in/oz. 40-150 Ncm, 50 insert bits & 1/4" bit holder.

Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28891	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T3
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.56 9/64, 5/32, 3/16"
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Triwing: #0, #1, #2, #3, #4
	iTorque Handle Range 60 - 210 Inch/oz.
	28581 - 1/4" Bit Holder

With Certificate of Calibration



52 Pc. Set

[SHOP](#)

**28892 52 Piece iTorque Bit Set, In Metal Storage Box** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 7-26 in/lbs. 0.8-3.0 Nm, 50 insert bits & 1/4" bit holder.

Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28892	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T3
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.57 9/64, 5/32, 3/16"
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Triwing: #0, #1, #2, #3, #4
	iTorque Handle Range 7 - 26 Inch/lbs.
	28581 - 1/4" Bit Holder

With Certificate of Calibration



52 Pc. Set

[SHOP](#)

**28893 52 Piece iTorque Bit Set, In Metal Storage Box** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable iTorque handle 9-50 in/lbs. 1.0-6.0 Nm, 50 insert bits & 1/4" bit holder.

Item	Slotted: 4.5, 5.5, 6.5, 8.0mm
No.	Phillips: #0, #1, #2, #3
28893	TORX®: T6, T7, T8, T9, T10, T15, T20, T25, T27, T3
lbs.	Hex Inch: 1/16, 5/64, 3/32, 7/64, 1/8, 2.61 9/64, 5/32, 3/16"
	Hex Metric: 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	Pozidriv: #0, #1, #2, #3
	Torq Set: #4, #5, #6, #8
	Square: #1, #2, #3
	Triwing: #0, #1, #2, #3, #4
	iTorque Handle Range 9 - 50 Inch/lbs.
	28581 - 1/4" Bit Holder







**Wiha SYSTEM 4 Micro Bits**



[SHOP](#)





**750 SYSTEM 4 Slotted Bits** High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	mm	mm	Inch	lbs.
75008	0.8	28	1.1	.01
75012	1.2	28	1.1	.01
75015	1.5	28	1.1	.01
75018	1.8	28	1.1	.01
75020	2.0	28	1.1	.01
75025	2.5	28	1.1	.01
75030	3.0	28	1.1	.01
75035	3.5	28	1.1	.01
75040	4.0	28	1.1	.01



[SHOP](#)





**751 SYSTEM 4 Phillips Bits** High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	Size	mm	Inch	lbs.
75105	000	28	1.1	.01
75110	00	28	1.1	.01
75115	0	28	1.1	.01
75120	1	28	1.1	.01



[SHOP](#)

**753 SYSTEM 4 Hex Inch Bits** High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	Inch	mm	Inch	lbs.
75307	.028	28	1.1	.01
75309	.035	28	1.1	.01
75313	.050	28	1.1	.01
75350	1/16	28	1.1	.01
75352	5/64	28	1.1	.01
75354	3/32	28	1.1	.01
75356	7/64	28	1.1	.01
75358	1/8	28	1.1	.01
75360	9/64	28	1.1	.01
75340	5/32	28	1.1	.01



[SHOP](#)





**757 SYSTEM 4 TORX® Bits** High alloy CVM steel, hardened, on 4 mm stock.

Item				
No.	Size	mm	Inch	lbs.
75701	T1	28	1.1	.01
75702	T2	28	1.1	.01
75703	T3	28	1.1	.01
75704	T4	28	1.1	.01
75705	T5	28	1.1	.01
75706	T6	28	1.1	.01
75707	T7	28	1.1	.01
75708	T8	28	1.1	.01
75709	T9	28	1.1	.01
75710	T10	28	1.1	.01
75715	T15	28	1.1	.01
75720	T20	28	1.1	.01



[SHOP](#)





**757 SYSTEM 4 Security TORX® Bits** High alloy CVM steel, hardened, on 4 mm stock.

Item				
No.	Size	mm	Inch	lbs.
75727	T7s	28	1.1	.01
75728	T8s	28	1.1	.01
75729	T9s	28	1.1	.01
75735	T10s	28	1.1	.01
75739	T15s	28	1.1	.01
75742	T20s	28	1.1	.01



[SHOP](#)





**753 SYSTEM 4 Hex Metric Bits** High alloy CVM steel, hardened, on 4 mm hex stock.

Item				
No.	mm	mm	Inch	lbs.
75307	0.7	28	1.1	.01
75309	0.9	28	1.1	.01
75313	1.3	28	1.1	.01
75315	1.5	28	1.1	.01
75320	2.0	28	1.1	.01
75325	2.5	28	1.1	.01
75330	3.0	28	1.1	.01
75340	4.0	28	1.1	.01







[SHOP](#)

**753 SYSTEM 4 Metric Security Hex Bits** CVM steel, hardened, on 4 mm hex stock.

Item				
No.	mm	mm	Inch	lbs.
75322	2.0	28	1.1	.01
75327	2.5	28	1.1	.01
75332	3.0	28	1.1	.01
75342	4.0	28	1.1	.01





**753 SYSTEM 4 Security Hex Inch Bits**

Item				
No.	Inch	mm	Inch	lbs.
75362	5/64	28	1.1	.01
75364	3/32	28	1.1	.01
75366	7/64	28	1.1	.01
75368	1/8	28	1.1	.01
75370	9/64	28	1.1	.01
75372	5/32	28	1.1	.01

[SHOP](#)







**757 SYSTEM 4 Pentalobe Bits** High alloy CVM steel, hardened, on 4 mm stock.

Item				
No.	Size	mm	Inch	lbs.
75743	PL1	28	1.1	.01
75744	PL2	28	1.1	.01
75745	PL3	28	1.1	.01
75746	PL4	28	1.1	.01
75747	PL5	28	1.1	.01
75748	PL6	28	1.1	.01

[SHOP](#)



**753 SYSTEM 4 Metric & Inch Nut Setters** CVM steel, hardened, on 4 mm hex stock.

Item No.				
Metric	mm	mm	Inch	lbs.
75820	2.0	30	1.2	.01
75821	2.5	30	1.2	.01
75822	3.0	30	1.2	.01
75823	3.5	30	1.2	.01
75824	4.0	30	1.2	.01
75825	4.5	30	1.2	.01
75826	5.0	30	1.2	.01
75827	5.5	30	1.2	.01
Inch	Inch	mm	Inch	lbs.
75810	5/64	30	1.2	.01
75811	3/32	30	1.2	.01
75812	7/64	30	1.2	.01
75813	1/8	30	1.2	.01
75814	9/64	30	1.2	.01
75815	5/32	30	1.2	.01
75816	3/16	30	1.2	.01
75817	7/32	30	1.2	.01





[SHOP](#)

**1/4" Drive Micro Bit Tool Adapters**



[SHOP](#)

**75802 Micro Bit To 1/4" Drive Insert Bit Adapter** uses magnets to hold 4mm Micro Bits





Item				
No.	Size	mm	mm	lbs.
75802	4.0	25	4.0	.01



[SHOP](#)

**75803 Long Micro Bit To 1/4" Drive Insert Bit Adapter**

uses spring clip non-magnetic to hold 4mm Micro Bits

Item				
No.	Size	mm	mm	lbs.
75803	4.0	38	4.0	.02

## Wiha Adjustable TorqueControl Tool Sets In Durable Storage Cases



**53 Pc. Set**

With Certificate of Calibration [SHOP](#)

**28595 53 Piece TorqueVario-S Bit Set, In Storage Box** Set includes ergonomic multi-component adjustable TorqueVario-S handle, 50 Insert bits, 1/4" Bit holder and Torque adjustment tool.

<b>Item</b>	<b>Slotted:</b> 4.5, 5.5, 6.5, 8.0mm
<b>No.</b>	<b>Phillips:</b> #0, #1, #2, #3
<b>28595</b>	<b>TORX®:</b> T6, T7, T8, T9, T10, T15, T20, T25, T27, T30
<b>lbs.</b>	<b>Hex Inch:</b> 1/16, 5/64, 3/32, 7/64, 2.85 1/8, 9/64, 5/32, 3/16"
	<b>Hex Metric:</b> 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0, 8.0mm
	<b>Pozidriv®:</b> #0, #1, #2, #3
	<b>Torq Set:</b> #4, #5, #6, #8
	<b>Square:</b> #1, #2, #3
	<b>Tri-Wing:</b> #0, #1, #2, #3, #4
	28506 - Handle Range 10-50 In/lbs.
	28581 - 1/4" Bit Holder



**59 Pc. Set**

With Certificate of Calibration [SHOP](#)

**28589 59 Piece TorqueVario-S Bit Set, In Storage Box** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable TorqueVario-S handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

<b>Item</b>	<b>Slotted:</b> 4.5, 5.5, 6.0mm
<b>No.</b>	<b>Phillips:</b> #0, #1, #2
<b>28589</b>	<b>TORX®:</b> T5, T6, T7, T8, T9, T10, T15, T20, T25, T30
<b>lbs.</b>	<b>Hex Inch:</b> .050, 1/16, 5/64, 3/32, 2.73 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"
	<b>Hex Metric:</b> 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	<b>Pozidriv®:</b> #1, #2
	<b>Square:</b> #1, #2, #3
	<b>Inch Sockets:</b> 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"
	<b>Metric Sockets:</b> 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm
	<b>3 Handles:</b> 15 - 80 In/oz., 5 - 10 & 10 - 50 In/lbs.
	1/4" Bit Holder
	1/4" Hex to 1/4" Square adapter



**59 Pc. Set**

With Certificate of Calibration [SHOP](#)

**28689 59 Piece Torque Newton Meter Bit Set, In Storage Box** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes 3 ergonomic multi-component adjustable Torque Nm handles, 39 Insert bits, 15 Sockets, 1/4" Bit holder, 1/4" Hex to 1/4" Square adapter and Torque adjustment tool.

<b>Item</b>	<b>Slotted:</b> 4.5, 5.5, 6.0mm
<b>No.</b>	<b>Phillips:</b> #0, #1, #2
<b>28689</b>	<b>TORX®:</b> T5, T6, T7, T8, T9, T10, T15, T20, T25, T30
<b>lbs.</b>	<b>Hex Inch:</b> .050, 1/16, 5/64, 3/32, 2.73 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"
	<b>Hex Metric:</b> 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	<b>Pozidriv®:</b> #1, #2
	<b>Square:</b> #1, #2, #3
	<b>Inch Sockets:</b> 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"
	<b>Metric Sockets:</b> 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm
	<b>3 Handles:</b> 0.1-0.6 Nm, 0.4-1.0 Nm & 1.0-5.0 Nm
	1/4" Bit Holder
	1/4" Hex to 1/4" Square adapter



With Certificate of Calibration

**59 Pc. Set**

[SHOP](#)

**28584 59 Pc. TorquControl Set** Includes Pistol Ratchet Handle 17.5-70 In/lbs., 1/4" Bit Holder & 1/4" Socket Adapter For Pistol Ratchet, Dynamic Handle, 1/4" Socket Adapter & Drive-Loc Bit Holder.

<b>lbs.</b>	<b>Slotted:</b> 4.5, 5.5, 6.0mm
<b>2.12</b>	<b>Phillips:</b> 0, 1, 2, 3
	<b>TORX®:</b> T7, T8, T9, T10, T15, T20, T25, T30, T40
	<b>Pozidriv®:</b> 1, 2, 3 <b>Square:</b> 1, 2, 3
	<b>Hex Inch:</b> 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"
	<b>Hex Metric:</b> 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	<b>Sockets Inch:</b> 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"
	<b>Sockets Metric:</b> 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm



**59 Pc. Set**

With Certificate of Calibration

**28585 59 Pc. TorquControl Nm Set** Includes: Pistol Ratchet Handle 2-8 Nm, 1/4" Bit Holder & 1/4" Socket Adapter For Pistol Ratchet, Dynamic Handle, 1/4" Socket Adapter & Drive-Loc Bit Holder.

<b>lbs.</b>	<b>Slotted:</b> 4.5, 5.5, 6.0mm
<b>2.12</b>	<b>Phillips:</b> 0, 1, 2, 3
	<b>TORX®:</b> T7, T8, T9, T10, T15, T20, T25, T30, T40
	<b>Pozidriv®:</b> 1, 2, 3 <b>Square:</b> 1, 2, 3
	<b>Hex Inch:</b> 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32, 3/16, 7/32, 1/4"
	<b>Hex Metric:</b> 1.5, 2.0, 2.5, 3.0, 4.0, 5.0, 6.0mm
	<b>Sockets Inch:</b> 5/32, 3/16, 7/32, 1/4, 9/32, 5/16, 3/8"
	<b>Sockets Metric:</b> 4.0, 4.5, 5.0, 5.5, 6.0, 7.0, 8.0mm

**Wiha Adjustable TorqueControl Tool Sets In Durable Storage Box**




With Certificate of Calibration

[SHOP](#)

**28590 24 Pc. TorqueVario-S Micro-Bit Set**

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder & Torque adjustment tool. Packed in a compact durable storage box.

<b>Item</b>	<b>Slotted:</b> 1.5, 2.0, 3.0, 4.0mm
<b>No.</b>	<b>Phillips:</b> #00, #0, #1
<b>28590</b>	<b>TORX®:</b> T6, T7, T8, T9, T10, T15
	<b>Hex Inch:</b> .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32
lbs.	1.35
	28504 - Handle Range 7.5 - 20 In/lbs.



With Certificate of Calibration

[SHOP](#)

**28593 24 Pc. TorqueVario-S Micro-Bit Set**

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder & Torque adjustment tool. Packed in a compact durable storage box.

<b>Item</b>	<b>Slotted:</b> 1.5, 2.0, 3.0, 4.0mm
<b>No.</b>	<b>Phillips:</b> #00, #0, #1
<b>28593</b>	<b>TORX®:</b> T6, T7, T8, T9, T10, T15
	<b>Hex Inch:</b> .050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32
lbs.	1.35
	28501 - Handle Range 15-80 In/oz. (+/- 10%)

**Wiha TorqueControl Sets In Durable Canvas Pouch**



[SHOP](#)

**28596 8 Piece TorqueControl Set With Slotted & Phillips Blades** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 6 blades & Torque adjustment tool. Packed in a durable canvas pouch.

<b>Item No.</b>	<b>28596</b>
<b>Slotted:</b>	2.5, 3.0, 3.5, 4.0mm
	<b>Phillips:</b> #0, #1
lbs.	1.0
	28504 - Handle Range 7.5 - 20 In/lbs.

With Certificate of Calibration



[SHOP](#)

**28599 14 Piece TorqueControl Set With TORX® & TORXPlus® Blades** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Ergonomic multi-component adjustable TorqueVario-S handle, 12 blades & Torque adjustment tool. Packed in a durable canvas pouch.

<b>Item</b>	<b>TORXPlus® :</b>	lbs. 1.25
<b>No.</b>	IP7, IP8, IP9, IP10, IP15, IP20	
<b>28599</b>	<b>TORX® :</b> T7, T8, T9, T10, T15, T20	
	28506 - Handle Range 10 - 50 In/lbs.	

With Certificate of Calibration



[SHOP](#)

**28597 8 Pc. TorqueControl Set With TORX® Blades** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

<b>Item</b>	lbs. 1.01
<b>No.</b>	<b>TORX® :</b> T7, T8, T9, T10, T15, T20
<b>28597</b>	28506 - Handle Range 10 - 50 In/lbs.

With Certificate of Calibration



[SHOP](#)

Screw Holding

**28690 8 Piece TorqueControl Set With MagicSpring TORXPlus® Screw Holding Blades** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

<b>Item</b>	lbs. 1.02
<b>No.</b>	<b>MagicSpring TORXPlus® :</b>
<b>28690</b>	IP7, IP8, IP9, IP10, IP15, IP20
	28506 - Handle Range 10 - 50 In/lbs.

With Certificate of Calibration



[SHOP](#)

**28598 8 Piece TorqueControl Set With TORXPlus® Blades** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M

<b>Item</b>	<b>TORXPlus®</b>	lbs. 1.00
<b>No.</b>	IP7, IP8, IP9, IP10, IP15, IP20	
<b>28598</b>	28506 - Handle Range 10 - 50 In/lbs.	

With Certificate of Calibration






## Wiha TorqueControl SoftFinish Pistol Ratchets

- Audible Click At Torque
- +/- 6% Repeatability
- Quick Turning Zone

Non-magnetic blade locking

SoftFinish cushion grip handle for high torques



Finely toothed ratchet with 72 teeth enables 5° switching angle

Pistol ratchet handles have a unique serial number & certificate of calibration



[SHOP](#)



[SHOP](#)

**28510 TorqueControl SoftFinish Pistol Ratchet** +/- 6% Accuracy. Audible and perceptible click when torque setting has been attained. Loosening torque approx. +30% greater than tightening torque. SoftFinish cushion grip handle for high torque.

Item No.	Range Nm	mm	mm	lbs.	Pkg.
28510	2-8	110	125	.68	1

**28570 TorqueControl SoftFinish Pistol Ratchet** +/- 6% Accuracy. Audible and perceptible click when torque setting has been attained. Loosening torque approx. +30% greater than tightening torque. SoftFinish cushion grip handle for high torque.

Item No.	Range In/lbs.	mm	mm	lbs.	Pkg.
28570	17.5-70	110	125	.68	1

\*Available February 2016



Torque Setting can be set with tool integrated in the handle

## Wiha Torque Adapters

### Adapters For Pistol Ratchets



[SHOP](#)

**39251 Pistol Ratchet Insert & Power Bit Holder For 1/4" Drive Bits - Magnetic Shaft** CVM steel, hardened, corrosion protected.

Item No.	Size	mm	mm	lbs.	pkg.
39251	1/4	6.0	50	.04	1



[SHOP](#)

**39256 Pistol Ratchet Socket Adapter 1/4" Square Sockets** Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	lbs.	pkg.
39256	1/4	53	.04	1



[SHOP](#)

**39257 Pistol Ratchet Socket Adapter 3/8" Square Sockets** Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	lbs.	pkg.
39257	3/8	53	.06	1



[SHOP](#)

**39258 Pistol Ratchet Adapter Fits Drive-Loc VI Blades** Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	lbs.	pkg.
39258	6.0	59	.04	1


**Notes:**



**Wiha Insulated TorqueControl Tools**

Includes Certificate



 **1000V**

[SHOP](#)

**287 Insulated TorqueVario-S, With Window Scale Insulation up to 1000Volt** EN ISO, BS EN, ASME, VDE, ASTM & NFPA70E standards, +/- 6% Accuracy. Handle sizes proportioned to optimize torque range. Audible and perceptible click when torque setting has been attained. Includes *SlimLine* blade holder.

Item No.	Range		Inch lbs.		
	Inch	lbs.	Increments	mm	lbs. pkg.
28724	7.5	- 20	.5 In.lbs.	131	.43 1
28726	10	- 50	2 In.lbs.	138	.40 1
28727	20	- 70	2 In.lbs.	142	.69 1

Each TorqueVario handle has unique serial number and certificate of calibration

[SHOP](#)

**287 Insulated TorqueVario-S Handle - In Newton Meter Scale** Includes *SlimLine* blade holder.

Item No.	Range		Inch lbs.		
	Nm	mm	lbs.	pkg.	
28734	0.6 - 2.0	131	.45	1	
28736	1.0 - 5.0	138	.45	1	
28737	2.0 - 8.0	142	.72	1	

**Wiha Insulated Torque Ratchet Wrenches**



[SHOP](#)



 **1000Volt**

**301 Insulated Torque Ratchet Wrenches, 1/4, 3/8, 1/2" Drives Insulated to EN/IEC 60900:2004, ASTM F1505-10, CSA Standards** Visible reading scale for easy reading and adjustment. Locking endcap Torque adjuster for easy adjustment. Accuracy +/- 6%. Dual scale reading Ft. lbs. / Nm.

Item No.	OAL		Inch lbs.		
	Inch	mm	Inch	Nm	lbs.
30114	1/4"	210	8.25	5-25	1.02
30138	3/8"	370	14.5	5-50	2.72
30152	1/2"	530	21.0	40-220	3.64

**Insulated Torque & SlimLine Tool Sets**

 **1000Volt**



[SHOP](#)

**28791 8 Piece Insulated TorqueControl Set With Slotted & Phillips SlimLine Blades**

Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 5 *SlimLine* blades, *SlimLine* blade holder & Torque adjustment tool.

**Item No.**

28791	<i>SlimLine</i> Slotted: 3.0, 4.0, 5.5mm
	<i>SlimLine</i> Phillips: #1, #2
lbs.	28726 - Handle Range 10-50 Inch/lbs.
.87	<i>SlimLine</i> Blade Holder

With Certificate of Calibration

 **1000Volt**



[SHOP](#)

**28792 16 Piece Insulated TorqueControl Set With SlimLine Blades** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes Insulated multi-component adjustable TorqueVario-S handle, 13 *SlimLine* blades, *SlimLine* blade holder & Torque adjustment tool.

**Item No.**

28792	<i>SlimLine</i> Slotted: 4.0, 5.5, 6.5mm
	<i>SlimLine</i> Phillips: #1, #2
lbs.	<i>SlimLine</i> Terminal Xeno: #1, 2
1.27	<i>SlimLine</i> TORX®: T8, T10, T15, T20
	<i>SlimLine</i> Square: #1, #2
	28727 - Handle Range 20-70 Inch/lbs.
	<i>SlimLine</i> Blade Holder

With Certificate of Calibration

## Wiha Insulated SlimLine Torque Blade Holder



 1000Volt



[SHOP](#)

### 28350 Insulated SlimLine Torque Blade

**Holder** CVM steel. Through hardened black finish. ClicFix quick release holder securely locks blades.

Item	OAL	OAL		
No.	mm	mm	Inch	lbs. pkg.
28350	6.0	170	6.75	.06 1



 1000Volt



[SHOP](#)

### 28370 Insulated SlimLine Torque Blade

**Holder** CVM steel. Through hardened black finish. Non-locking friction fit blade holder for SlimLine Blades.

Item	OAL	OAL		
No.	mm	mm	Inch	lbs. pkg.
28370	6.0	170	6.75	.06 1

## Notes:





## Wiha Insulated SlimLine Blades



[SHOP](#)

### 283 Insulated Slotted SlimLine Blades

High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.




Item			Slim	Max	Inch/		
No.	mm	Inch	Dia.	Nm	lbs.	lbs.	pkg.
28307	2.5	.098	4.0	0.4	3.5	.02	1
28308	3.0	.118	4.0	0.6	5.3	.02	1
28309	4.0	.157	4.0	2.5	22.1	.02	1
28312	5.5	.216	6.0	3.8	33.6	.02	1
28315	6.5	.255	6.0	5.5	48.7	.02	1



[SHOP](#)

### 283 Insulated Pozidriv® SlimLine Blades

SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.




Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28330	1	4.0	3.8	33.7	.02	1
28331	2	6.0	5.5	48.8	.02	1



[SHOP](#)

### 283 Insulated Phillips SlimLine Blades

High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.




Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28317	1	4.0	3.8	33.6	.02	1
28319	2	6.0	5.5	48.7	.02	1



[SHOP](#)

### 283 Insulated Hex Metric SlimLine Blades

SlimLine blades have up to 33% narrower insulation dia. than standard insulated tools.




Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28332	1.5	4.0	0.9	7.9	.02	1
28333	2.0	4.0	1.8	15.9	.02	1
28334	2.5	4.0	3.8	33.6	.02	1
28335	3.0	4.0	5.5	48.7	.02	1
28336	4.0	6.0	5.5	48.7	.02	1
28337	5.0	6.0	5.5	48.7	.02	1
28338	6.0	6.0	5.5	48.7	.02	1



[SHOP](#)

### 283 Insulated Xeno Slotted Pozidriv® SlimLine Blades

Up to 33% narrower insulation dia. than standard insulated tools.




Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28320	1	4.0	3.8	33.6	.02	1
28321	2	6.0	5.5	48.7	.02	1



[SHOP](#)

### 283 Insulated TORX SlimLine Blades

High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.




Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28339	T8	4.0	1.3	11.5	.02	1
28340	T10	4.0	3.8	33.6	.02	1
28341	T15	6.0	5.5	48.7	.02	1
28342	T20	6.0	5.5	48.7	.02	1
28343	T25	6.0	5.5	48.7	.02	1



[SHOP](#)

### 283 Insulated Xeno Slotted & Phillips SlimLine Blades

High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.




Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28327	1	4.0	3.8	33.7	.02	1
28329	2	6.0	5.5	48.8	.02	1



[SHOP](#)

### 283 Insulated Square SlimLine Blades


High quality CV steel, through hardened. SlimLine blades have up to 33% narrower insulation diameter than standard insulated tools.

Item		Slim	Max	Inch/		
No.	Size	Dia.	Nm	lbs.	lbs.	pkg.
28346	1	4.0	3.8	33.6	.02	1
28347	2	6.0	5.5	48.7	.02	1



**ESD Safe Adjustable TorqueControl Tools**



**285 ESD Safe TorqueVario-S, With Window Scale** EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6% Accuracy. Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. With Certificate of accuracy.  Pkg. 1

Item No.	Range	Inch lbs.	Increments	mm	lbs.
28522*	15 - 80(in/oz)	2.5 In.oz.	122-127	.33	
28524	5 - 10	.2 In.lbs.	122-127	.34	
28526	7.5 - 20	.5 In.lbs.	126-131	.42	

Item No.	Range	Nm	mm	Inch	lbs.	pkg.
28500*	.04 - .46	124	4.875"	.35	1	

\* +/- 10% (This unit only)

Each TorqueVario handle has unique serial number and certificate of calibration



**28591 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.

Item No.	Slotted:	Phillips:	TORX®:	Hex Inch:	Hex Metric:	lbs.
28591	1.5, 2.0, 3.0, 4.0mm	#00, #0, #1	T6, T7, T8, T9, T10, T15	.050, 1/16, 5/64, 3/32, 7/64, 1/8, 9/64, 5/32"	0.7, 0.9, 1.3mm	1.31

28524 - Handle ESD Safe Range 5 - 10 Inch lbs.



**28890 24 Piece TorqueVario-S ESD Safe Micro-Bit Set** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool.  +/- 10%

Item No.	Slotted:	Phillips:	TORX®:	Hex Inch:	Hex Metric:	lbs.
28890	0.8, 1.2, 1.5, 2.0mm	#000, #00, #0	T1, T2, T3, T4, T5, T6	0.7, 0.9, 1.3mm	0.7, 0.9, 1.3mm	1.35

28522 - ESD Safe Handle Range 15-80 Inch/oz.



**28895 24 Piece ESD Safe Adjustable TorqueVario-S Bit Set** Certified to EN ISO 6798, BS EN 26789, ASME B107.14M. Set includes ergonomic multi-component adjustable TorqueVario-S handle, 21 Micro Bits, Micro Bit holder and Torque adjustment tool, packed in a compact durable storage box.  +/- 10%

Item No.	Slotted:	Phillips:	TORX®:	Hex Metric:	Pentalobe:	lbs.
28895	0.8, 1.2, 1.5, 2.0mm	#000, #00, #0	T1, T2, T3, T4, T5, T6	0.7, 0.9, 1.3mm	PL1, PL2, PL3, PL4	1.30

28500 - Handle ESD Safe .04 - .46Nm (+/-10%)



**288 ESD Safe Slotted Interchangeable Blades For TorqueVario-S** Slotted tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item No.	mm	Inch	mm	Nm	lbs.	pkg.
28801	1.5	.059	175	0.15	.07	1
28803	2.0	.078	175	0.4	.07	1
28805	3.0	.118	175	0.6	.07	1
28807	3.5	.139	175	1.1	.07	1
28809	4.0	.157	175	2.5	.07	1



**288 ESD Safe Phillips Interchangeable Blades For TorqueVario-S** Phillips tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item No.	Size	mm	mm	Nm	lbs.	pkg.
28810	000	175	4.0	0.4	.07	1
28812	00	175	4.0	0.4	.07	1
28814	0	175	4.0	0.9	.07	1
28816	1	175	4.0	3.8	.07	1



**288 ESD Safe TORX® Interchangeable Blades For TorqueVario-S** TORX® tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, hard chromed.

Item No.	Size	mm	mm	Nm	lbs.	pkg.
28825	T5	175	4.0	0.4	.07	1
28826	T6	175	4.0	0.6	.07	1
28827	T7	175	4.0	0.9	.07	1
28828	T8	175	4.0	1.3	.07	1
28829	T9	175	4.0	2.5	.07	1
28830	T10	175	4.0	3.8	.07	1

## ESD Safe TorqueControl Tools



**285 ESD Safe TorqueVario-S Newton Meter, With Window Scale** EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 10% Accuracy. Ergonomic multi-component handle, light and compact. Handle sizes proportioned to optimize torque range. Audible & perceptible click when torque setting has been attained. With Certificate of accuracy.

Item No.	Range	Nm	mm	Inch	lbs.	pkg.
28500	.04 - .46		124	4.875"	.35	1

ESD TorqueVario handle has unique serial number and certificate of calibration



**288 ESD Safe Pentalobe Interchangeable Blades For TorqueVario-S Newton Meter** Handle tip blades on narrow 5/32 Hex shafts. High alloy CVM steel, hardened, hard chromed.

Item No.	Size	mm	mm	lbs.	pkg.
28818	PL1	175	4.0	.07	1



**28882 ESD Safe Bit Holder Adapter For 1/4" Drive Bits** Shaft CVM steel, hardened, corrosion protected. (Not for use in Insulated handles)

Item No.	Size	mm	mm	lbs.	pkg.
28882	1/4	162	4.0	.09	1

## T-handle TorqueControl Handles



Accuracy Ergonomic multi-component handle, light & compact

Includes Calibration Certificate [SHOP](#)

**289 TorqueFix T-handle** EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6%

Item No.	Torque In-lbs.	Torque Nm	mm x mm	lbs.	pkg.
28931	53.1	6	56 x 120	.81	1
28933	70.8	8	56 x 120	.82	1
28935	88.5	10	56 x 120	.79	1
28937	106.2	12	56 x 120	.79	1
28938	110.6	12.5	56 x 120	.80	1
28939	123.9	14	56 x 120	.80	1

Each TorqueFix T-handle has unique serial number and certificate of calibration



Includes Calibration Certificate [SHOP](#)

**28940 Adjustable TorqueVario STplus T-handle** EN ISO 6798, BS EN 26789, ASME B107.14M, +/- 6%

Item No.	Torque Nm	Torque In-lbs.	mm x mm	lbs.	pkg.
28940	5-14	44.3-123.9	56 x 120	.81	1

\* (1 Nm 8.8507) (Scale is shown in Nm only)

## T-handle TorqueControl Blades



**289 TORX® Interchangeable Blades For TorqueFix T-Handle** TORX® tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, hard chromed.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28903	T15	130	5.1	6.0	.10	1
28904	T20	130	5.1	6.0	.10	1
28905	T25	130	5.1	6.0	.11	1
28906	T27	130	5.1	6.0	.11	1
28907	T30	130	5.1	6.0	.11	1
28908	T40	130	5.1	6.0	.11	1



**289 Hex Metric Interchangeable Blades For TorqueFix T-Handle** Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item No.	mm	mm	Inch	lbs.	pkg.
28916	3.0	130	5.1	.11	1
28917	4.0	130	5.1	.11	1
28918	5.0	130	5.1	.11	1
28919	6.0	130	5.1	.11	1



**289 TORXPlus® Interchangeable Blades For TorqueFix T-Handle** TORXPlus® tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, hard chromed.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28910	IP15	130	5.1	6.0	.10	1
28911	IP20	130	5.1	6.0	.10	1
28912	IP25	130	5.1	6.0	.11	1
28913	IP27	130	5.1	6.0	.11	1
28914	IP30	130	5.1	6.0	.11	1
28915	IP40	130	5.1	6.0	.11	1



**289 Hex Inch Interchangeable Blades For TorqueFix T-Handle** Hex tip blades on 6mm Hex shafts. High alloy CVM steel, hardened, satin hard chrome finish.

Item No.	Inch	mm	Inch	lbs.	pkg.
28920	1/8	130	5.1	.11	1
28921	9/64	130	5.1	.11	1
28922	5/32	130	5.1	.11	1
28923	3/16	130	5.1	.11	1
28924	7/32	130	5.1	.11	1

## Wiha T-handle TorqueControl Adapters



**289 TorqueFix Adapter For 1/4" & 3/8" Sockets** Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28926	1/4	100	3.9	6.0	.12	1
28927	3/8	100	3.9	6.0	.15	1



**28925 TorqueFix Quick Release Bit Holder** Shaft CVM steel, hardened, corrosion protected.

Item No.	Size	mm	Inch	mm	lbs.	pkg.
28925	1/4	125	4.9	6.0	.15	1

## Maximum Recommended Torque For Wiha Torque Blades

Tip Size	Style	Maximum Torque	
T5	TORX	.4 Nm	3.5 in.lbs
T6	TORX	.6 Nm	5.31 in.lbs
T7	TORX	.9 Nm	7.9 in.lbs
T8	TORX	1.3 Nm	11.5 in.lbs
T9	TORX	2.5 Nm	22.1 in.lbs
T10	TORX	3.8 Nm	33.6 in.lbs
T15	TORX	5.5 Nm	48.7 in.lbs
T20	TORX	8.0 Nm	70.8 in.lbs
T25	TORX	8.0 Nm	70.8 in.lbs
IP5	TORX Plus	.5 Nm	4.4 in.lbs
IP6	TORX Plus	.8 Nm	7.0 in.lbs
IP7	TORX Plus	1.3 Nm	11.5 in.lbs
IP8	TORX Plus	2.0 Nm	17.7 in.lbs
IP9	TORX Plus	3.0 Nm	26.5 in.lbs
IP10	TORX Plus	4.5 Nm	39.8 in.lbs
IP15	TORX Plus	6.6 Nm	58.4 in.lbs
IP20	TORX Plus	8.0 Nm	70.8 in.lbs
IP25	TORX Plus	8.0 Nm	70.8 in.lbs
1.5	Slotted	.15 Nm	1.3 in.lbs
2.0	Slotted	.4 Nm	3.5 in.lbs
2.5	Slotted	.4 Nm	3.5 in.lbs
3.0	Slotted	.6 Nm	5.31 in.lbs
3.5	Slotted	1.1 Nm	9.7 in.lbs
4.0	Slotted	2.5 Nm	22.1 in.lbs
#000	Phillips	.4 Nm	3.5 in.lbs
#00	Phillips	.4 Nm	3.5 in.lbs
#0	Phillips	.9 Nm	7.9 in.lbs
#1	Phillips	3.8 Nm	33.6 in.lbs
#2	Phillips	5.5 Nm	48.6 in.lbs
1.5	Hex Metric	.9 Nm	7.9 in.lbs
2.0	Hex Metric	1.8 Nm	15.9 in.lbs
2.5	Hex Metric	3.8 Nm	33.6 in.lbs
3.0	Hex Metric	5.5 Nm	48.6 in.lbs
4.0	Hex Metric	8.0 Nm	70.8 in.lbs
.050	Hex Inch	.4 Nm	3.5 in.lbs
1/16	Hex Inch	.9 Nm	7.9 in.lbs
5/64	Hex Inch	1.8 Nm	15.9 in.lbs
3/32	Hex Inch	1.8 Nm	15.9 in.lbs
7/64	Hex Inch	3.8 Nm	33.6 in.lbs
1/8	Hex Inch	5.5 Nm	48.6 in.lbs
9/64	Hex Inch	8.0 Nm	70.8 in.lbs
5/32	Hex Inch	8.0 Nm	70.8 in.lbs



### Numerical Index by Item Number

Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page	Item No.	Page
28300	13	28370	14	28531	6	28576	6	28734	13
28307	14	28374	4	28532	6	28577	6	28736	13
28308	14	28375	4	28533	6	28578	6	28737	13
28309	14	28376	4	28534	6	28579	6	28791	13
28312	14	28377	4	28535	6	28580	4	28792	13
28315	14	28378	4	28536	6	28581	7	28801	15
28317	14	28379	4	28537	6	28582	7	28803	15
28319	14	28380	4	28538	6	28583	7	28805	15
28320	14	28381	4	28539	6	28584	10	28807	15
28321	14	28382	4	28540	6	28585	10	28809	15
28327	14	28383	4	28541	6	28587	6	28810	15
28329	14	28384	4	28542	6	28588	6	28812	15
28330	14	28385	4	28543	6	28589	10	28814	15
28331	14	28386	4	28544	6	28590	11	28816	15
28332	14	28387	4	28545	6	28591	15	28818	16
28333	14	28388	4	28546	6	28593	11	28825	15
28334	14	28389	4	28547	6	28595	10	28826	15
28335	14	28500	15,16	28548	6	28596	11	28827	15
28336	14	28501	5	28549	6	28597	11	28828	15
28337	14	28502	5	28550	5	28598	11	28829	15
28338	14	28503	5	28551	5	28599	11	28830	15
28339	14	28504	5	28552	5	28611	6	28882	6,16
28340	14	28505	5	28553	5	28612	6	28886	8
28341	14	28506	5	28554	5	28613	6	28887	8
28342	14	28507	5	28555	6	28614	6	28888	8
28343	14	28508	5	28556	6	28616	6	28890	15
28346	14	28509	5	28557	6	28617	6	28891	8
28347	14	28510	12	28558	6	28618	6	28892	8
28349	4	28511	5	28559	6	28619	6	28893	8
28350	14	28512	6	28560	6	28620	7	28895	15
28351	4	28513	5	28561	6	28622	7	28903	16
28352	4	28515	5	28562	6	28624	7	28904	16
28353	4	28517	5	28563	6	28626	7	28905	16
28354	4	28518	5	28564	6	28627	7	28906	16
28355	4	28519	5	28565	6	28629	7	28907	16
28356	4	28521	5	28566	6	28632	7	28908	16
28357	4	28522	15	28567	6	28633	7	28910	16
28358	4	28523	5	28568	6	28637	7	28911	16
28359	4	28524	15	28569	6	28638	7	28912	16
28360	4	28525	5	28570	12	28644	7	28913	16
28361	4	28526	15	28571	6	28689	10	28914	16
28362	4	28527	6	28572	6	28690	11	28915	16
28363	4	28528	6	28573	6	28724	13	28916	16
28364	4	28529	6	28574	6	28726	13	28917	16
28365	4	28530	6	28575	6	28727	13	28918	16



MANUFACTURING  
EXCELLENCE  
AWARD  
BESTES KMU  
2014

WIHA – WINNER OF THE  
MX AWARD 2014.  
GERMANY'S BEST SME.



Like Us On  
facebook

**wiha**   
Tools that work for you



(800) 494-6104  
fax: (800) 494-7456  
cservice@wihatools.com  
www.wihatools.com

Catalog Item No. 99001.wo  
version - 2/15/16

Subject to change  
without notice

©2016 Willi Hahn Corporation

@Torx is a registered trademark of  
Acument Intellectual Properties LLC.



**Wiha Quality Tools**  
1348 Dundas Circle  
Monticello, MN 55362  
tel: 763.295.6591  
fax: 763.295.6598

**Wiha Tools Canada Ltd.**  
www.wihatools.ca  
Brampton, ONT L6T 4X4  
tel: 866.494.0096 or 763.295.6591  
fax: 763.295.6598

To:

**SEE OUR  
GREAT  
WEB  
SPECIALS!**



99977.wo - Pliers/Crimpers Catalog



99004.wo - Shop Tools Catalog



99914.wo - TORX Catalog



99951.wo - Bits Catalog



99919.wo - Insulated Catalog



99002.wo - Screwdrivers Catalog




99934.wo - Hex Tools Catalog



99006.wo - Tech Tools Catalog



99945.wo - ESD Catalog

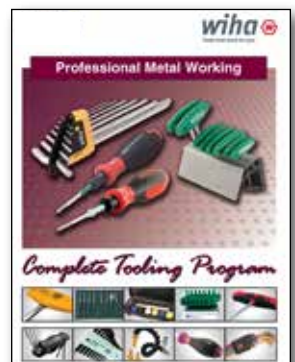

91330.wo - Tooling Catalog