


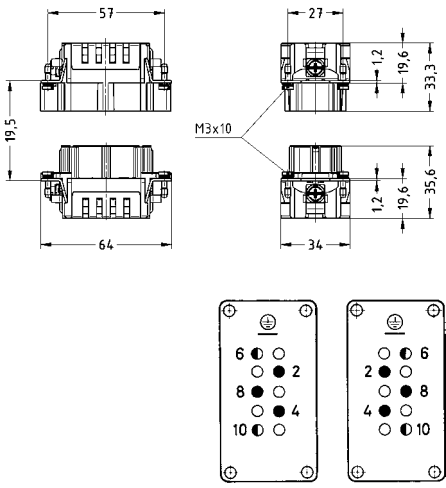

Number of contacts

3+

830 V

16 A

+ 2 additional contacts for safe high voltage connections

Identification	Wire cross section (mm²)	Part number male female		Drawing Dimensions in mm
<p>Han® Hv ES, Cage-clamp terminal, silver plated contacts, contact resistance ≤3 mOhm</p>  <p>not plug compatible to Han Hv E® screw/crimp terminal</p>	<p>0.14 – 2.5</p>	<p>09 34 003 2616</p>	<p>09 34 003 2716</p>	 <p> M F Contact arrangement (view from termination side) Han® 3 Hv ES ♦ Working contact ● Relay contact ○ Without contact </p>  <p>Panel cut out for inserts for use without hoods/housings</p>