

FEATURES

- High speed
- High reliability
- Point source emission

DESCRIPTION

The **PDI-E825** is a high power 850 nm GaAlAs point source infrared emitter packaged in a TO-46 metal header with a clear plastic lens cap.

APPLICATIONS

- Fiber optic source
- Infrared sources
- Optical readers




ABSOLUTE MAXIMUM RATING (TA) = 23°C UNLESS OTHERWISE NOTED

SYMBOL	PARAMETER	MIN	MAX	UNITS
P_d	Power Dissipation		200	mW
I_f	Continuous Forward Current		100	mA
I_p	Peak Forward Current		2.5	A
V_r	Reverse Voltage		2	V
T_{STG}	Storage Temperature	-55	+125	°C
T_O	Operating Temperature	-55	+125	°C
T_S	Soldering Temperature*		+240	°C

* 1/16 inch from case for 3 seconds max.

RADIATION PATTERN

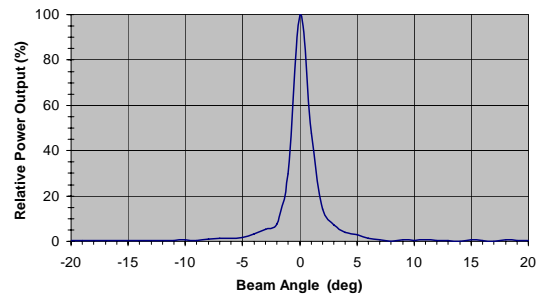

ELECTRO-OPTICAL CHARACTERISTICS RATING (TA) = 23°C UNLESS OTHERWISE NOTED

SYMBOL	CHARACTERISTIC	TEST CONDITIONS	MIN	TYP	MAX	UNITS
P_o	Output Power	$I_f = 100$ mA	2.2	2.7		mW
V_f	Forward Voltage	$I_f = 100$ mA		1.7	2.2	V
V_r	Reverse Breakdown Voltage	$I_f = 10$ μ A	2.0			V
λ_p	Peak Wavelength	$I_f = 20$ mA	830	850	870	nm
$\Delta\lambda$	Spectral Bandwidth @ 50% (FWHM)	$I_f = 20$ mA		35		nm
C_t	Terminal Capacitance	$V_r = 0$ V, $f = 1$ MHz		68		pF
t_r	Rise Time	$I_f = 20$ mA		15		nS
t_f	Fall Time	$I_f = 20$ mA		15		nS

Information in this technical datasheet is believed to be correct and reliable. However, no responsibility is assumed for possible inaccuracies or omission. Specifications are subject to change without notice. © 2007 Advanced Photonix, Inc. All rights reserved.