
| Date    | SYM | REVISION RECORD        | AUTH | DR.  | CK. |
|---------|-----|------------------------|------|------|-----|
| 8/16/03 | А   | REVISED TITLE          | T.B. | B.S. |     |
| 8/18/06 | В   | ADDED "ROHS COMPLIANT" | T.B. | B.S. |     |
|         |     |                        |      |      |     |
|         |     |                        |      |      |     |
|         |     |                        |      |      |     |

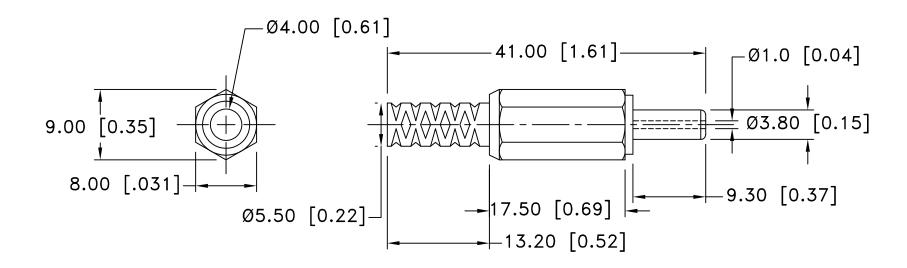

NOTES:

MAX. RATING: 12V 5A.

MATERIAL:

1) INSULATOR: ABS

2) PLUG: BRASS, NICKLE PLATED

3) COVER: PP ROHS COMPLIANT

| Tolerance         | Memory Protection Devices, Inc                 |  |       |                  |  |  |  |
|-------------------|--|--|-------|------------------|--|--|--|
| (Except as noted) | 200  | 200 Broad Hollow Road, Farmingdale, New York 11735 |       |                  |  |  |  |
| decimal           |  |  | Scale | Drawn By B.S.    |  |  |  |
| ±.5 (.020)        |  |  |       | Approved By T.B. |  |  |  |
| Fractional        | Title  |  |       |                  |  |  |  |
| ± .8 (.030)       | DC PLUG- 1.0 X 3.8mm MOLDED WITH STRAIN RELIEF |  |       |                  |  |  |  |
| Angular           | Date   | Drawing Nu   | mber  |                  |  |  |  |
| ± 3°              | 8/18/06 EP505-A                                |  |       | 05-A             |  |  |  |