

(2.00 mm) .0787"

CLT SERIES

# LOW PROFILE DUAL WIPE SOCKET

## SPECIFICATIONS



For complete specifications and recommended PCB layouts see [www.samtec.com?CLT](http://www.samtec.com?CLT)

**Insulator Material:** Black Liquid Crystal Polymer  
**Contact Material:** Phosphor Bronze  
**Plating:** Sn or Au over 50 μ" (1.27 μm) Ni  
**Current Rating (TMMH/CLT):** 4.1 A per pin (1 pin powered per row)  
**Operating Temp Range:** -55 °C to +125 °C  
**Contact Resistance:** 10 mΩ  
**Insertion Depth:**  
 Top Entry= (1.40 mm) .055" minimum  
 Bottom Entry= (2.57 mm) .101" minimum (add board thickness for correct post OAL)  
**Max Cycles:** 100 with 10 μ" (0.25 μm) Au  
**RoHS Compliant:** Yes

Mates with: TMM, TMMH, MTMM, MMT, TW, TSH



Available with optional Pick & Place Pads

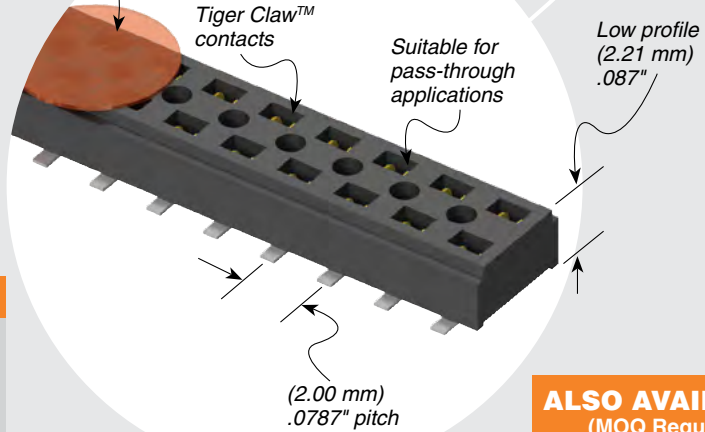

**ALSO AVAILABLE (MOQ Required)**

- Other platings
- Contact Samtec.

## PROCESSING

**Lead-Free Solderable:** Yes  
**SMT Lead Coplanarity:**  
 (0.10 mm) .004" max (02-25)  
 (0.15 mm) .006" max (26-34)  
 (0.20 mm) .008" max (35-50)

## RECOGNITIONS

For complete scope of recognitions see [www.samtec.com/quality](http://www.samtec.com/quality)



FILE NO. E111594

<b>CLT</b>	<b>1</b>	<b>NO. PINS PER ROW</b>	<b>LEAD STYLE</b>	<b>PLATING OPTION</b>	<b>D</b>	<b>OTHER OPTIONS</b>
		<b>02 thru 50</b>	<p>-01 = Through-hole</p> <p>-02 = Surface Mount</p> <p>-03 = Through-hole</p>	<p>-F = Gold flash on contact, Matte Tin on tail</p> <p>-L = 10 μ" (0.25 μm) Gold on contact, Matte Tin on tail</p> <p>-G = 10 μ" (0.25 μm) Gold on contact, Gold flash on tail</p>		<p>All options require Style -02</p> <p>-BE = Bottom Entry (Required for bottom entry applications)</p> <p>-A = Alignment Pin (3 positions minimum) Metal or plastic at Samtec's discretion</p> <p>-K = (5.00 mm) .197" DIA Polyimide Film Pick &amp; Place Pad (04 thru 50 only)</p> <p>-P = Pick &amp; Place Pad (4 positions minimum) (Not always necessary for auto placement.)</p> <p>-TR = Tape &amp; Reel Packaging (36 positions max)</p>

LEAD STYLE	A
-01	(2.16) .085
-03	(2.95) .116

**Note:** Some lengths, styles and options are non-standard, non-returnable.