NOTES:

REFERENCE STANDARD | IEC60|69-|| (4.1/9.5) | IEC60|69-|6 (N)

I. ELECTRICAL PERFORMANCE -

: 50 Ω NOMINAL IMPEDANCE FREQUENCY RANGE DC-3.0 GHz : 1.065 MAX.

: -160dBc MAX.(1800MHz) PIM -0.05 dB MAX. (@3.0 GHz) 5000 MΩ MIN. INSERTION LOSS

INSULATION RESISTANCE 2500 VRMS D.W.V

: OUTER CONDUCTOR 0.4 m $\Omega$  MAX (N) 0.5 m $\Omega$  MAX (4.1/9.5) INNER CONDUCTOR 0.8 m $\Omega$  MAX (N) 1.0 m $\Omega$  MAX (4.1/9.5) CONTACT RESISTANCE

II. MECHANICAL PERFORMANCE -

: 4.00 N MIN (4.1/9.5) RETENTION

MATING CYCLES : 500 MIN NUT - TORQUE 5 N-m (N) NUT - AXIAL PULL : 500 N

III.MATERIAL AND PLATING -

INNER CONDUCTOR : SPRING COPPER ALLOY, PLATING = Ag (5µm MIN.)
OUTER CONDUCTOR : BRASS, PLATING = Ag (5µm MIN.)

BRASS, PLATING = NĬ (5μm MIN.) NUT

GASKET SILICONE RUBBER

INSULATOR : PTFE


IV. ENVIRONMENTAL -

TEMP.RANGE : -40°C TO +85°C


: IEC 60068 40 / 085/ 21 WEATHER STANDARD : IEC 60068 -2-14-NA THERMAL SHOCK VIBRATION : IEC 60068-2-6-Fc : IEC 60068-2-27 SHOCK

V. ROHS COMPLIANT.

242281 REVISIONS DRAWING NO. REV DESCRIPTION DATE ECO APPR THIRD ANGLE PROJ.  $\oplus$   $\Box$  A RELEASE TO MFG. 16-Sep-13 MB/BCG - -



SCALE 1.000

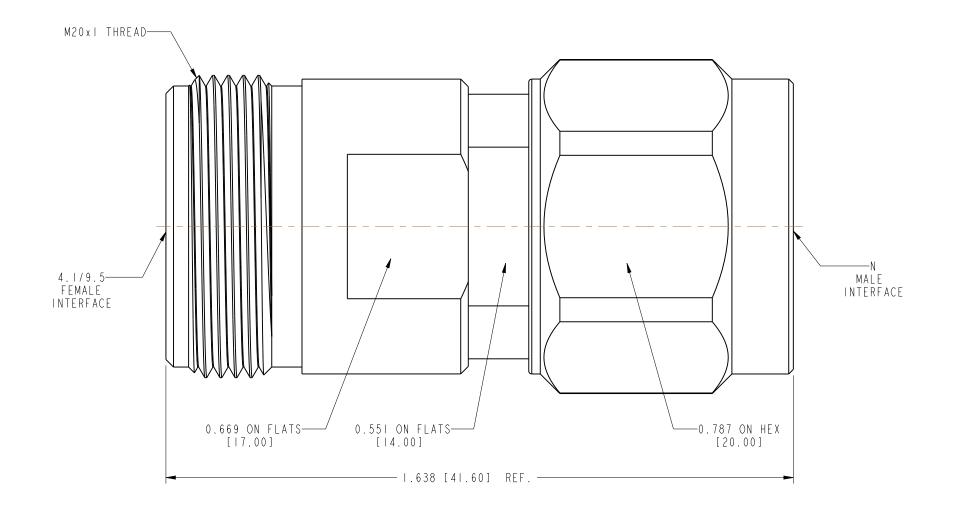

## **CUSTOMER OUTLINE DRAWING**

ALL OTHER SHEETS ARE FOR INTERNAL USE ONLY

· ·	MATERIAL	DRAWN	DATE	TITLE	
$\begin{array}{cccccccccccccccccccccccccccccccccccc$	SEE NOTES	MOHAN ENGINEER	05-Sep-13 DATE	4.1/9.5 FEMALE TO N MALF	Amphenol Connex
	APPROVED				
	B.C. GLEISSNER	16-Sep-13	ADAPTER	SCALE: 4.0:1 SHEET 1 OF 1	
	rights or permitting such holder or any other person to manufacture, use or sell any		CAD FILE		DWG SIZE DRAWING
product, process or design, patented or otherwise, that may in any way be related to or disclosed by said drawings, specifications, or other data.				l B	242281 A