

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION

© COPYRIGHT - By -

ALL RIGHTS RESERVED.

LOC G DIST 14


REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	H4	REVISED PER ECO-12-007422	19APR12	HMR	DR

**AMP**  
WIRE RANGE

---

22-20 AWG  
STRANDED

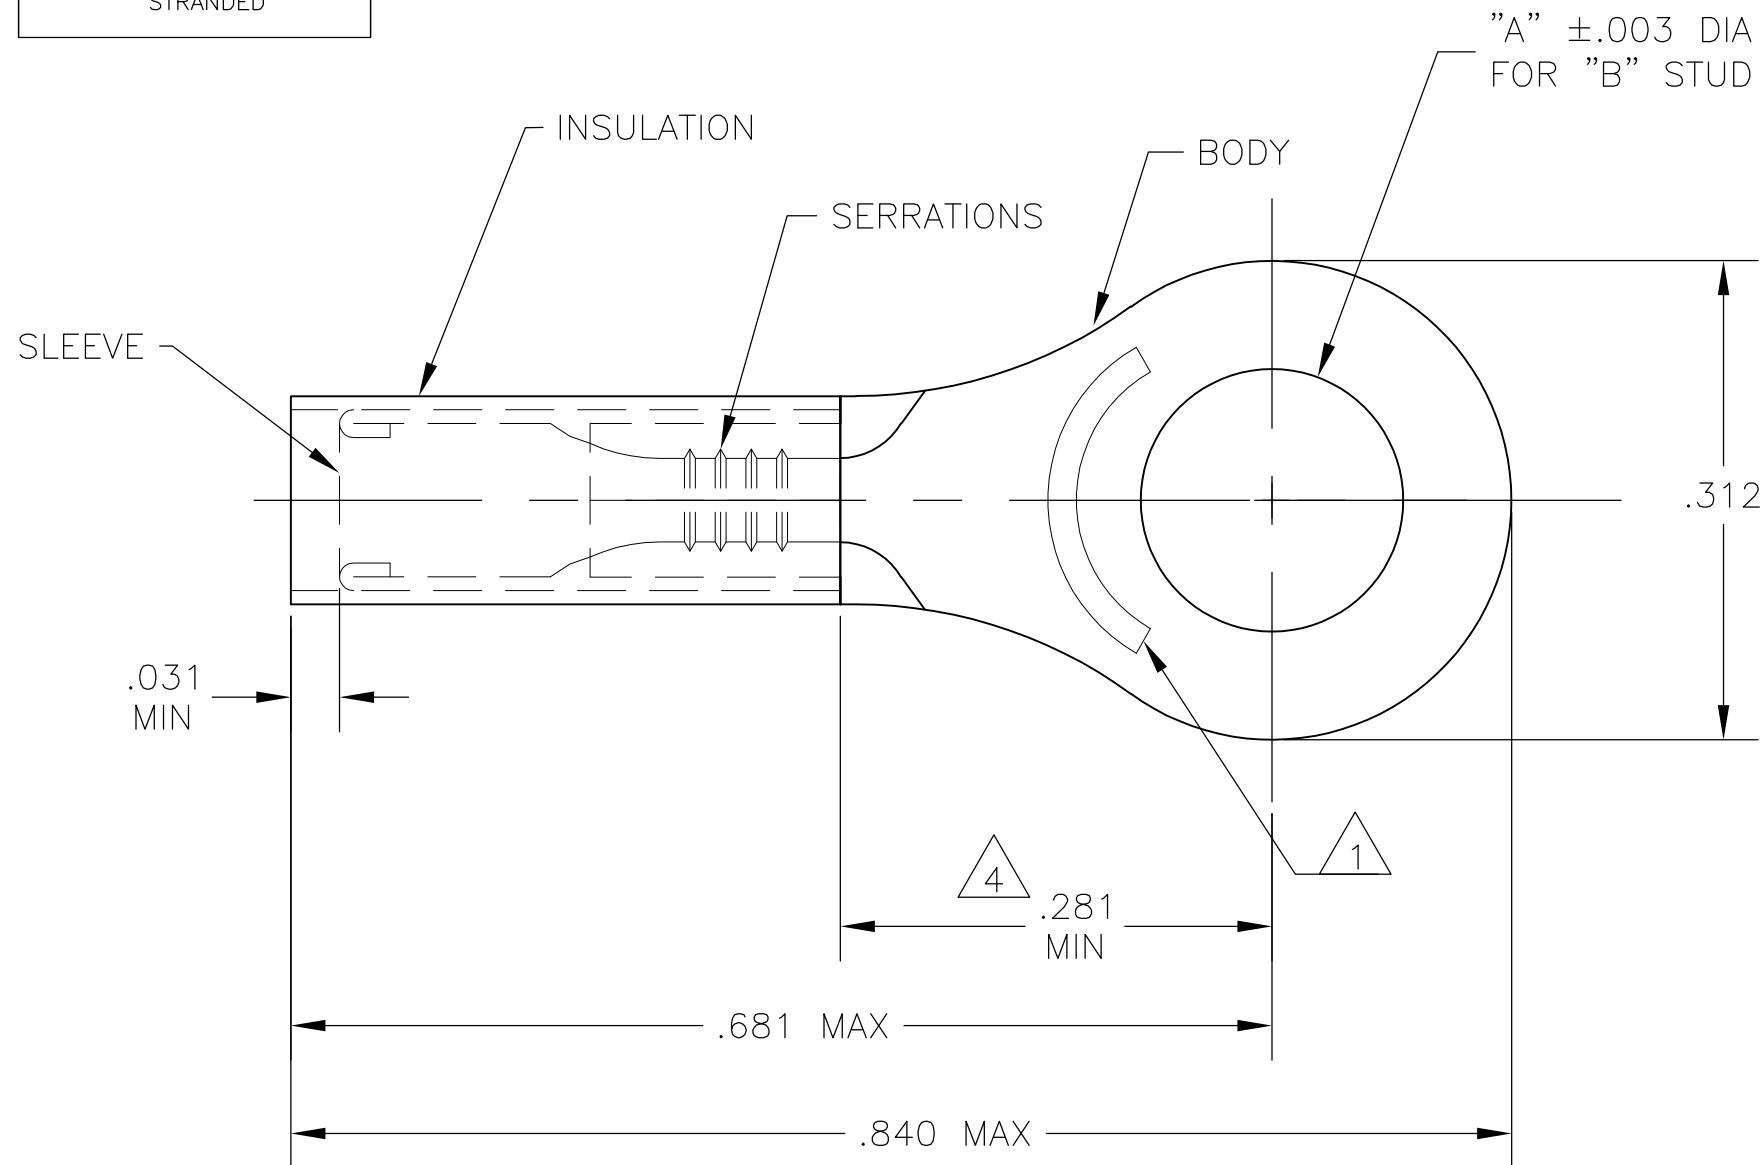

- 1 STAMP AMP 22-20 APPROX AS SHOWN
- 2 FOR .035 TO .100 WIRE INSULATION DIA
- 3 TONGUE MATERIAL THK .023±.002
- 4 DIMENSION APPLIES FROM EDGE OF METAL WIRE BARREL TO CENTER OF STUD HOLE.
- 5 BODY: MATERIAL - COPPER ASTM B152 FINISH - OVER NICKEL PLATE (QQ-N-290) .0003 AVG EXT. THK.
- 6 SLEEVE: MATERIAL - COPPER ASTM B152 FINISH - NICKEL PL. ( QQ-N-290) .00003 AVG EXT. THK.
- 7 INSULATION: MATERIAL - PTFE ( ASTM D3295) COLOR: GREEN

#10	.197	100	LOOSE PIECE,BAG	8-50832-1
#10	.197	2500	50832-1 ON TAPE	50832-3
#8	.171	2500	50832 ON TAPE	50832-2
#10	.197	1000	LOOSE PIECE	50832-1
#8	.171	1000	LOOSE PIECE	50832
"B"	"A"	QTY	PACKAGE TYPE	PART NO.

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN JR RUTH 30JAN03	<b>STE</b> TE Connectivity	
DIMENSIONS: INCHES		CHK T MICHELUTTI 30JAN03		
TOLERANCES UNLESS OTHERWISE SPECIFIED:		APVD T MICHELUTTI 30JAN03	NAME	
0 PLC ± -		PRODUCT SPEC	TERMINAL - PTFE, PIDG, STRATO-THERM, RING TONGUE, 22-20 AWG	
1 PLC ± -		APPLICATION SPEC	SIZE CAGE CODE DRAWING NO RESTRICTED TO	
2 PLC ± .02		WEIGHT -	A3 00779 C-50832	
3 PLC ± .005		CUSTOMER DRAWING	SCALE 8:1	SHEET 1 OF 1
4 PLC ± -			REV H4	
ANGLES ± 1°				
MATERIAL				
FINISH				