




UNIT:mm

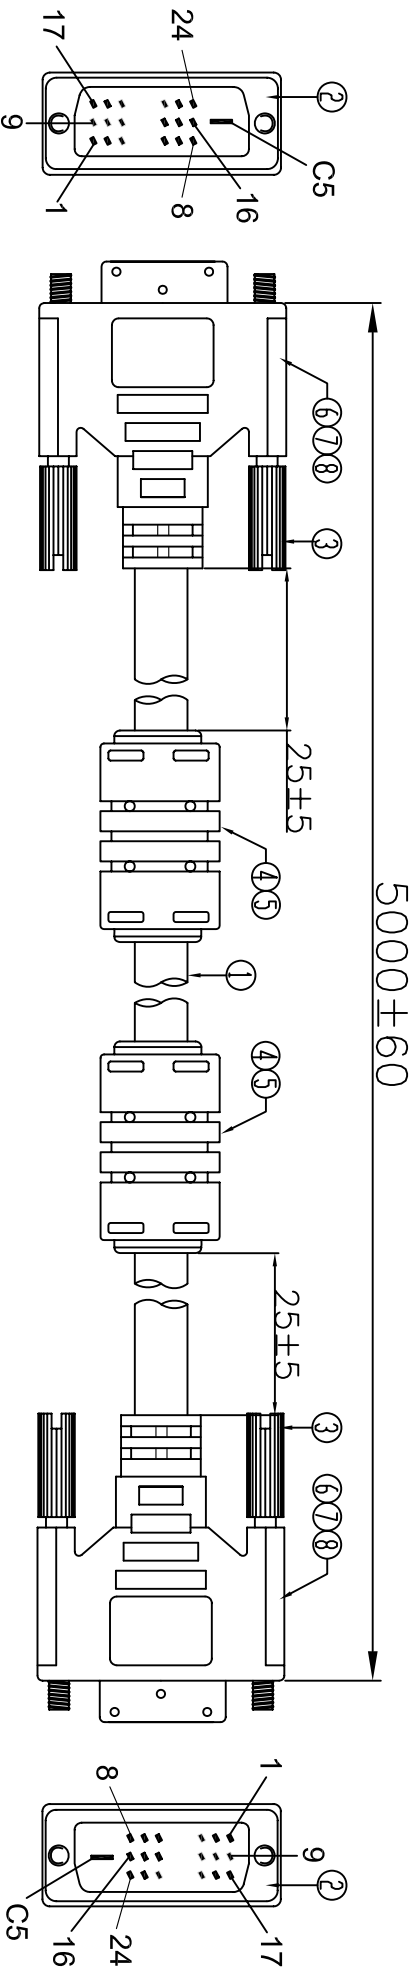

Electronic Test:

1. 100% Test,(Open,Short,Miss Wire)
2. Contact Resistance:2 ohm max.
3. Insulation Resistance:10M ohm min.
4. Hi-Pot:300V DC/10ms
5. BENDING TEST:ANGLE 90°,BENDING 2~3 TIMES UP AND DOWN.

NO.	NAME	Q'TY	SPECIFICATION
⑧	TUBE	8	HEAT SHRINK TUBE BLACK OD2.0mm L=8mm
		8	HEAT SHRINK TUBE BLACK OD1.0mm L=15mm
		2	HEAT SHRINK TUBE BLACK OD0.8mm L=25mm
⑦	Copper	2	DOUBLE-SIDED CONDUCTIVE COPPER FOIL W30mm*L75mm
⑥	IN JACKET	8g	CLEAR PE(NM-15)
		30g	WHITE(EC-005/W-18#) PVC 50P(WM-17)
⑤	OUT JACKET	20g	BLACK PVC 45P (CH-002)
④	FERRITE	2	Core:RH17.5*10.6*28.5mm
③	SCREW	4	SCREW #4*40UNS Ø2.8*L32mm NICKEL MOLD WHITE(EC-005/W-18#) ABS
②	CONN	2	DVI MALE 18+1 INSULATION BLACK:SHELL NICKEL,PIN GOLD FLASH.
①	CABLE	1	UL20276 [(28AWG/1P+DW+AL/MY)*4C+28AWG*5C]+AL/MY+BD+D.W+BD+JACKET:BLACK OD:7.0±0.15mm L=5000+50/-0mm.

Cnc Tech, LLC
Industrial Cable and Connector Technology

DRAWN BY	ZHONGHS	DRAWING NO.	
CHECKED BY		CUSTOMER	
APPROVAL BY		ITEM NO.	750-10010-00500
DECIDE BY		DATE	2012-02-07
VERSIONS/EDITION	A/0	PROJECTION	