

MODEL NUMBER
ATT-0550-XX-35M-02


NOTES:

- 1.0 SPECIFICATIONS:
 1.1 FREQUENCY RANGE: DC to 26.5 GHz
 1.2 ATTENUATION ACCURACY:
 0dB +0.5dB
 0.5-6.5dB ±0.5dB
 7-20dB ±0.7dB
 21-40dB ±1.5dB
 1.3 MAXIMUM VSWR: 1.07 + 0.015 f (GHz)
 1.4 MAXIMUM INPUT POWER: 2 WATTS AVG.
 AT +25°C DERATED LINEARLY TO 0.5
 WATTS AT +125°C
 1.5 OPERATING TEMP. RANGE: -65°C to +125°C

2 MARKING

2.1 MARK UNIT AS SHOWN
 (REF.: INK-06747-27-XX)

3.0 DIMENSIONS IN PARENTHESIS ARE
 IN MILLIMETERS

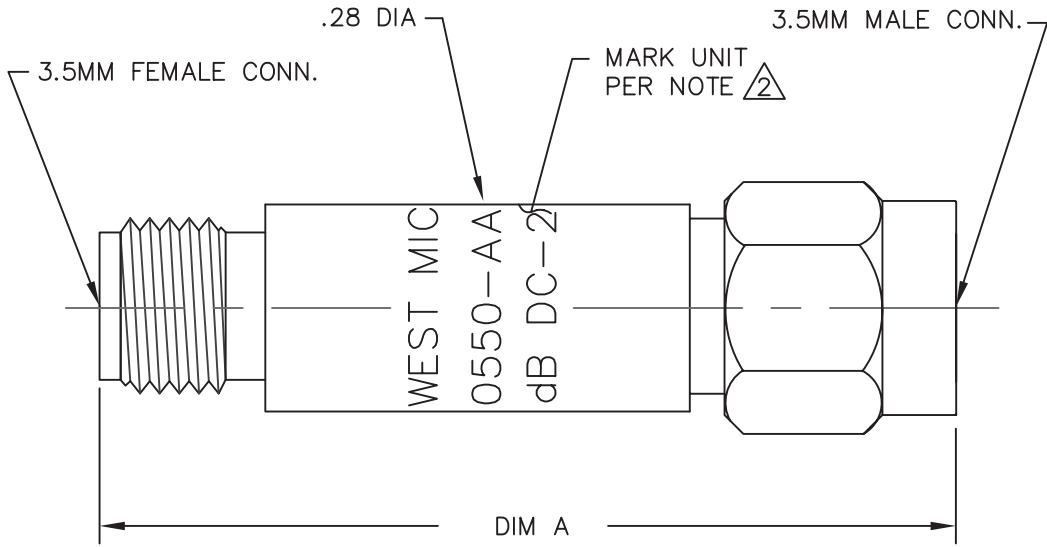


ATTENUATION VALUE	DIM A
0 - 29dB	1.36 (34.5)
30 - 40dB	1.47 (37.3)

WAS DWG. #: 06608-01-00

REV.	DESCRIPTION	DATE
-	RELEASED	2/26/86
A	ECR 4550	5/27/86
B	ECR 4946	11/4/86
C	ECR 5703	11/5/87
D	ECR 5734	11/30/87
E	ECR 6545	8/1/89
F	ECR 6933	1/23/90
G	ECR 7143	2/6/90
H	ECR 7564	7/25/90
I	ECN 10814	7/23/91
J	ECN 11089	10/22/91
K	ECN 13321	3/14/94
L	ECN 15336	6/12/96
M	ECN 18722	9/9/02

NOTICE: The information contained in this drawing is proprietary and must not be used without the permission of Cinch Connectivity Solutions.
 UNLESS OTHERWISE NOTED DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:
 3 PLACE DECIMALS ±.005
 2 PLACE DECIMALS ±.02
 FRACTIONS ±1/64
 PARALLELITY: T.I.R. _____
 FLATNESS: T.I.R. _____
 CONCENTRICITY: T.I.R. _____
 ANGLES AND PERPENDICULARITY: ±1°

CAGE CODE 34078		MIDWEST MICROWAVE	
		TITLE ATTENUATOR OUTLINE DRAWING	
		DRAWING NUMBER ATT-0550-XX-35M-02-01	
DRAWN/DATE C.RICKARD 7/23/91	ENG./DATE G.KOZAK 7/29/91	REV. M	
CHECKED/DATE A.BEATTY 7/29/91	APPROVED/DATE	SCALE: 5=1	SHEET 1 of 1