
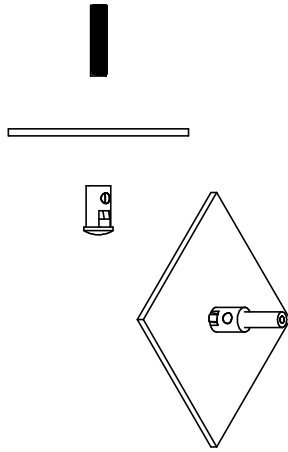


© COPYRIGHT 2010 BY INDUSTRIAL FIBER OPTICS, INC.
ALL RIGHTS RESERVED.

LIGHT PIPE PREPARATION/INSTALLATION:




NOTES:

1. ROHS COMPLIANT
2. UL 94V-2 FLAMMABILITY RATING
3. -40°C TO 85°C OPERATING TEMPERATURE
4. SUITABLE FOR LIGHT PIPE WITH $\varnothing 2.2\text{mm}$ JACKET AND OPTICAL CORE NO GREATER THAN $\varnothing 1.5\text{mm}$

REVISIONS

REV	DESCRIPTION	ECO	DATE	DWN	APVD
A	Initial release		11/12/2008	BB	RD
B	Redrew, fixed diameter of mounting hole	0065	2/9/2010	BB	AR

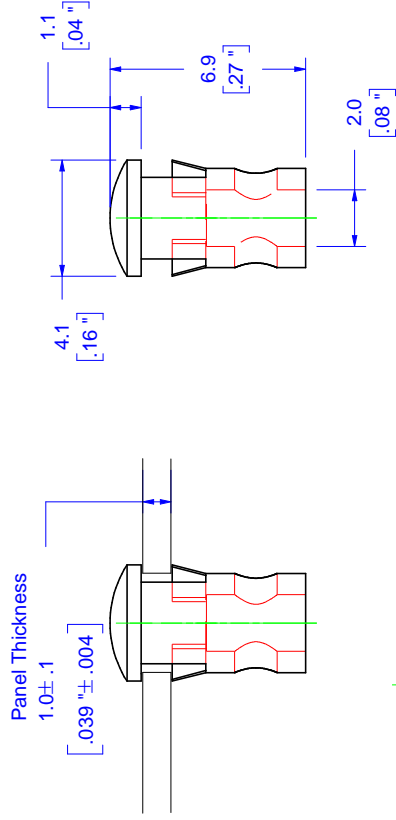

MOUNTING HOLE

PART IS MADE OF TRANSPARENT POLYCARBONATE.

UNLESS OTHERWISE SPECIFIED DIMENSIONS MILLIMETERS [IN.]	PRODUCT	Light Pipe
TOLERANCES	MATERIAL	Polycarbonate
0 PLC: ±1	FINISH	
1 PLC: ±.25	DRAWN BY	B. Bidwell
2 PLC: ±.127	DATE	2/9/2010
3 PLC: ±.025	CHECKED BY	A. Reyes
4 PLC: ±.013	DATE	2/11/2010
ANGLE: ±1/2°		
REMOVE BURRS AND SHARP EDGES FLATNESS .005mm PER mm ALL DIMENSIONS AFTER FINISH		

INDUSTRIAL FIBER OPTICS
TEMPE, AZ 85281


NAME

Lens, Light Pipe to Panel

SIZE	SCALE	PART NUMBER	REV
A	4:1	51 0350	B

DO NOT SCALE DRAWING

Sheet 1 of 1



METRIC