
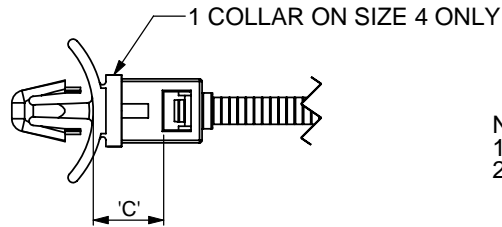


PART No.	MIN. LOOP TENSILE Kg [lbs]	'L' (REF)	'A'	'B' (REF)	'C' (REF)	'D' (REF)	'T'	'W'	HOLE DIA. ±0.08 [.003]	MAX BUNDLE DIAMETER
WIT-30RRAA-16	13 [30]	180.7 [7.114]	7.9 [.311]	14.3 [.562]	25.4 [1.00]	6.6 [.259]	1.3 [.051]	3.6 [.141]	6.35 [.250]	31.8 [1.250]
WIT-30RRAA-12	13 [30]	174.3 [6.862]	7.9 [.311]	14.3 [.562]	19.8 [.779]	6.6 [.259]	1.3 [.051]	3.6 [.141]	6.35 [.250]	31.8 [1.250]
WIT-30RRAA-8	13 [30]	168.0 [6.614]	7.9 [.311]	14.3 [.562]	13.5 [.531]	6.6 [.259]	1.3 [.051]	3.6 [.141]	6.35 [.250]	31.8 [1.250]
WIT-30RRAA-4	13 [30]	161.6 [6.362]	7.9 [.311]	14.3 [.562]	7.1 [.279]	6.6 [.259]	1.3 [.051]	3.6 [.141]	6.35 [.250]	31.8 [1.250]
WIT-30RRA-16	13 [30]	179.4 [7.062]	7.1 [.279]	14.3 [.562]	25.4 [1.00]	5.3 [.210]	1.3 [.051]	3.6 [.141]	4.8 [.187]	31.8 [1.250]
WIT-30RRA-12	13 [30]	173.0 [6.812]	7.1 [.279]	14.3 [.562]	19.8 [.779]	5.3 [.210]	1.3 [.051]	3.6 [.141]	4.8 [.187]	31.8 [1.250]
WIT-30RRA-8	13 [30]	166.7 [6.562]	7.1 [.279]	14.3 [.562]	13.5 [.531]	5.3 [.210]	1.3 [.051]	3.6 [.141]	4.8 [.187]	31.8 [1.250]
WIT-30RRA-4	13 [30]	160.3 [6.312]	7.1 [.279]	14.3 [.562]	7.1 [.279]	5.3 [.210]	1.3 [.051]	3.6 [.141]	4.8 [.187]	31.8 [1.250]

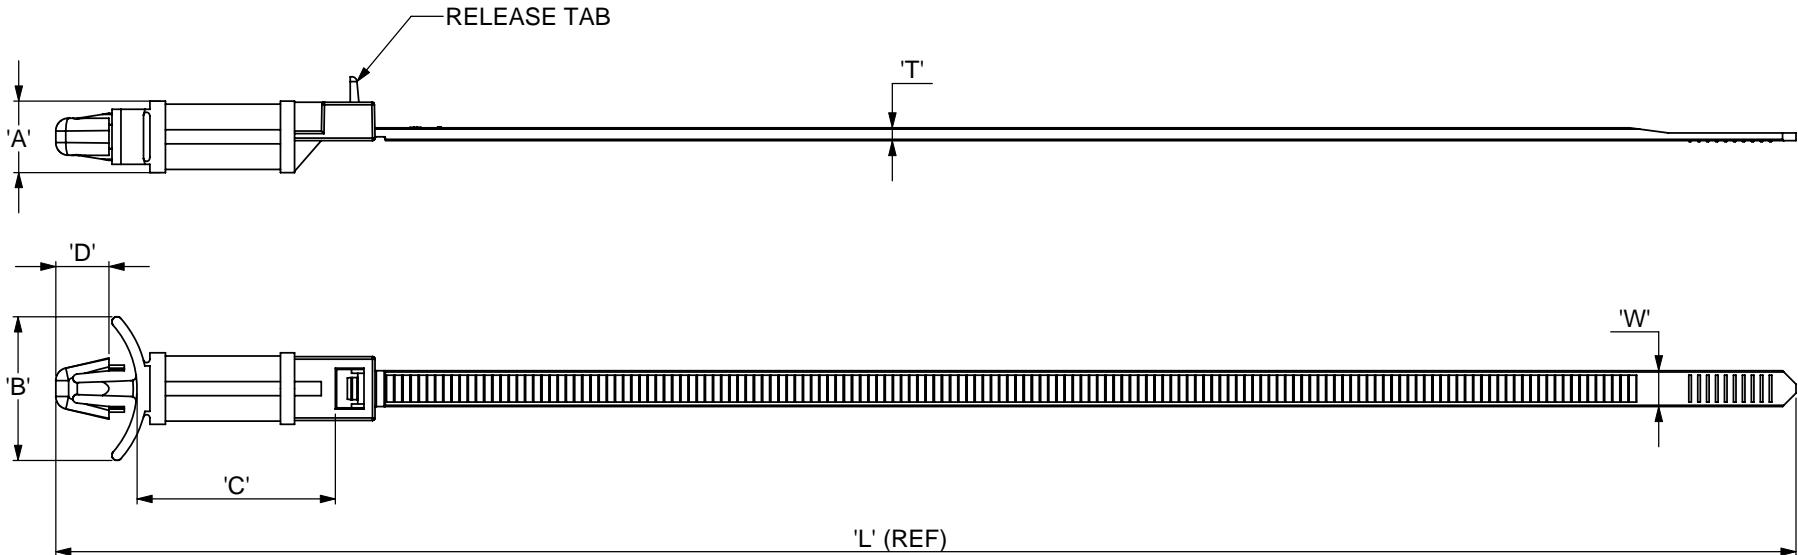

NOTES:

- 1) PANEL THICKNESS: 0.8-2.0 [.030-.078]
- 2) OTHER MATERIALS AVAILABLE BY SPECIAL ORDER. ADD '-HS', '-V0', '-UVB' OR '-HT' BEFORE '-M' IN THE PART NUMBER. EXAMPLE: WIT-30RRA-4-V0-M.
 - a) HEAT STABILIZED NYLON 6/6, UL94 V-2, RMS-47, COLOUR: BLACK
 - b) NYLON 6/6, UL94 V-0, RMS-19, COLOUR: NATURAL
 - c) UVB STABILIZED NYLON 6/6 UL94 V-2, RMS-46, COLOUR: BLACK
 - d) NYLON 6/6, UL94 V-2, RMS-01, COLOUR: BLACK
 - e) HIGH TEMPERATURE NYLON 4/6 UL94 V-2, RMS-109, COLOUR: NATURAL

09	CO-2010582	26/02/09	TC
08	CO-2010232	14/05/08	SF
07	CO-2010215	08/05/08	SF
06	CO-2010212	07/05/08	SF
05	CO-2010178	09/04/08	MT
REV	MODIFICATION	DATE	DRN

INFORMATION CONTAINED IN THIS DOCUMENT IS CONFIDENTIAL TO RICHCO INTERNATIONAL Co. Ltd. AND MAY NOT BE DISCLOSED OR REPRODUCED IN WHOLE OR PART WITHOUT THEIR WRITTEN CONSENT.

Richco

METRIC PRIMARY UNITS: mm
 IMPERIAL SECONDARY UNITS [inches]
 GENERAL TOLERANCES ±0.25 [0.010]
 UNLESS OTHERWISE STATED
 1 DECIMAL PLACE ± 0.25
 2 DECIMAL PLACES ± 0.1
 ANGULAR ±1°

THIRD ANGLE

MATERIAL:	NYLON 6/6 UL94-V2 (RMS-01)	COLOUR:	NATURAL
DESCRIPTION:	WIT-30RRA(A) Releasable Self-Mount Ties.	PART No:	SEE TABLE
DRG No:	07-001	NPR No:	2006-303
DRN	NJB	DATE	05/01/07
CHKD	TC	DATE	05/01/07
SCALE	NTS	SHEET No.	1 OF 1