

## Marker for terminal blocks - UCT2-TM 5/6 CUS - 0829250

Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://phoenixcontact.com/download>)

Marker for terminal blocks, can be ordered: by sheet, white, labeled according to customer specifications, Mounting type: Snap into tall marker groove, for terminal block width: 5.2 mm, Lettering field: 4.2 x 8.4 mm



The figure shows the UCT2-TM 5/6 version

### Why buy this product

- The UCT2-TM 5/6 UniCard markers are suitable for Wago terminal blocks
- The multi-section marking strips are easy to fit and can be easily separated if required
- The markers, which are supplied in uniform sheets, can be labeled quickly, easily, and precisely using the THERMOMARK CARD and the BLUEMARK LED
- Labeling service: Phoenix Contact can custom-label all UniCard markers according to your requirements
- The markers support multi-line labeling
- The sheets provide space for including function texts



### Key Commercial Data

Packing unit	1 STK
Weight per Piece (excluding packing)	5.412 g
Custom tariff number	49119900
Country of origin	Poland

### Technical data

#### Dimensions

Length (b)	10.2 mm
Width (a)	4.35 mm
Height	2.65 mm

#### Ambient conditions

## Marker for terminal blocks - UCT2-TM 5/6 CUS - 0829250

### Technical data

#### Ambient conditions

Ambient temperature (operation)	-40 °C ... 120 °C
---------------------------------	-------------------

#### General

Note	Can be labeled via thermal transfer
Color	white
Components	free from silicone and halogen
Flammability rating according to UL 94	V0
Material	PC
	PC
Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Number of individual labels	72
Number of individual labels per row	12
RoHS compliant	Yes
Printability	Thermal transfer
	Inkjet printing
Device	5146464 THERMOMARK CARD
	5146615 THERMOMARK CARD-UCT-MAG5
	5147888 BLUEMARK LED
	5147999 BLUEMARK CLED
Ink ribbon	0801371 THERMOMARK-RIBBON 110-TC
	5147421 BLUEMARK FLUID-CARTRIDGE
	5146662 BLUEMARK CLED-FLUID-CARTR.
Test for substances that would hinder coating with paint or varnish	VW PV 3.10.7:2005-02
Result	Test passed
Test specification weathering-resistance	Following ISO 4892-2:2013-03
Test duration	96 h
Wipe resistance test result	Test passed
Salt spray test specification	DIN EN 60068-2-11:2000-02
Test duration	96 min.
Salt spray testing result	Test passed
Alternating condensation climate with SO2 test specification	DIN 50018:2013-05
Climate level	AHT 1.0 S
Cycles	2
Condensation test result	Test passed
Wipe resistance of test specification inscriptions	DIN EN 61010-1 (VDE 0411-1):2011-07
Result	Test passed
Marking mounting type	Snap into tall marker groove

# Marker for terminal blocks - UCT2-TM 5/6 CUS - 0829250


## Technical data

### Standards and Regulations

Wipe resistance	DIN EN 61010-1 (VDE 0411-1)
Flammability rating according to UL 94	V0

## Drawings

Schematic diagram

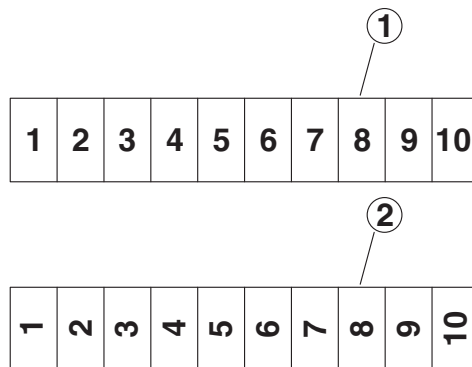

- ① Horizontal
- ② Vertical

## Classifications

### eCl@ss

eCl@ss 4.0	24190219
eCl@ss 4.1	24190219
eCl@ss 5.0	27141137
eCl@ss 5.1	27141137
eCl@ss 6.0	27141137
eCl@ss 7.0	27141137
eCl@ss 8.0	27141137
eCl@ss 9.0	27141137

### ETIM

ETIM 4.0	EC000761
ETIM 5.0	EC000761

### UNSPSC

UNSPSC 6.01	30211811
UNSPSC 7.0901	39121410

## Marker for terminal blocks - UCT2-TM 5/6 CUS - 0829250

### Classifications

#### UNSPSC

UNSPSC 11	39121410
UNSPSC 12.01	39121410
UNSPSC 13.2	39121410