
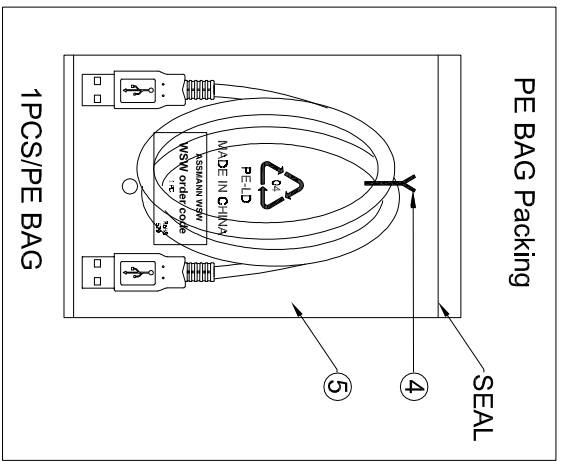


CABLE WHITE PRINT
 HI-SPEED USB Revision 2.0 SHIELDED 28AWG/1P+24AWG/2C
 AWM STYLE 2725 80°C 30V VW-1

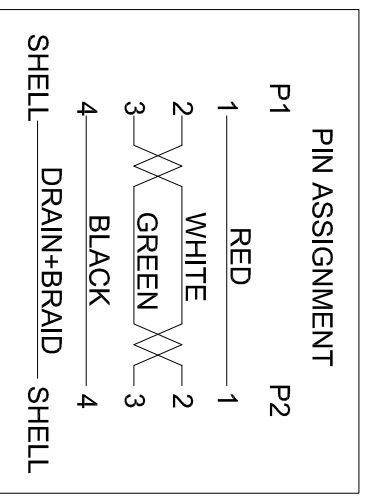

- Electrical test:
1. 100% short, open, miswire test
 2. Conduct resistance: 2Ω max.
 3. Insulation resistance:
 AK670/2-1-Black&AK670/2-2-Black: 5MΩ min.
 AK670/2-3-Black&AK670/2-5-Black: 10MΩ min.
 4. Dielectric test: DC 300V

⑤	PE BAG	1	Clear Print Black"MADE IN CHINA"+"1PC."
④	TIE	1	Black
③	OUT JACKET	10g	Black PVC-40P
②	CABLE	1	Black USB2.0 UL2725 28#/1P+24#/2C+AEB OD:4.7mm
①	CONN	2	USB 2.0 A MALE Nickel PIN G/F 3PCS TYPE Insulator color:White
No.	NAME	QTY	DESCRIPTION

WSW order code	Cable length	PE BAG SIZE
AK670/2-1-Black	1000±30mm	100*200*0.05mm
AK670/2-2-Black	2000±50mm	130*230*0.05mm
AK670/2-3-Black	3000±50mm	130*230*0.05mm
AK670/2-5-Black	5000±50mm	150*280*0.05mm

ROHS compliant
 Unit: mm

Scale	FREE	TOLERANCE	DIM	TOL	Angle	TOL	Id.	Modification	Date	Name	Customer-No.
							①	Drawn	24.10.2014	Amy	ASSMANN WSW-No. AK670/2-x-Black
									24.10.2014	Amy	ASSMANN WSW-No. AK670/2-x-Black
											ASSMANN WSW-No. AK670/2-x-Black



ASSMANN WSW components
 Drawing-No. ASS 7243 CA
 rev00

1	2	3	4	5	6	7
H	G	F	E	D	C	B